

BAL Part Schedule	
F(DTSxx) - Deemed-to-Satisfy No F(DTS40) system available F(40) - BAL40 (based on testing)	
(A) HEAD BASE & CENTRE HEAD PILES	
F(DTS12.5-29)	PBF69425 brush seal
F(40)	PBF69425 brush seal
(B) GLAZING	
F(DTS12.5)	4mm (min.) Grade A Safety Glass (laminated or toughened) Outer Pane
F(DTS19-29)	5mm (min.) Toughened Glass Outer Pane
F(40)	4mm (min.) Clear Toughened Glass on each face (1200mm max. height) (1200mm max. width)
(C) SILL BASE & SILL INSERT PILES	
F(DTS12.5-29)	PBF69375 brush seal
F(40)	PBF69375 brush seal
(D) SILL BASE FLAP SEALS	
F(DTS12.5-29)	3153 Santoprene flap seal
F(40)	3153 Santoprene flap seal

aneeta insert is shown here in 100mm commercial framing but it suits other BAL compliant frame types

N:\Documentation\Website Downloads\4. Special Applications\4. Bushfire\HSF 2P22 SS A (B) - BAL12.5 to 40 2 pane 22mm DOUBLE GLAZED sashless horizontal sliders in aluminium frames SS.dwg

Rev	Description	Approved By	Date
A	Original Issue	SB	Nov2012
B	Update locks, layout	SE	Jun2024

Proprietary and confidential
The information contained in this drawing is the sole property of Aneeta Australia. Any reproduction in part or as a whole, without the written permission of Aneeta Australia is prohibited.

Title:
BAL12.5 to 40 2 pane 22mm DOUBLE GLAZED sashless horizontal sliders in aluminium frames SS
vertical section A-A

Drwn:- Chk: - Date: - Scale: 1:2@A4




949 Stud Road, Rowville VIC 3178, ABN 80 062 883 729

Sheet 2 of 2 Revision: B

Material:	in Aluminium Frame
Finish:	
Die/Part:	
Dwg No:	HSF 2P22 SS A

IF IN DOUBT ASK - DO NOT SCALE DRAWING



BAL Part Schedule

F(DTSxx) - Deemed-to-Satisfy
 No F(DTS40) system available
 F(40) - BAL40 (based on testing)

G JAMB FOAM

F(DTS12.5-29) FS473x33 foam seal

F(40) FS473x33 foam seal

H JAMB PILES


F(DTS12.5-29) PBF48525 brush seal

F(40) PBF48525 brush seal


I MEETING RAILS

F(DTS12.5-29) PB48625 brush seal

F(40) PB48625 brush seal



aneeta insert is shown here in 100mm commercial framing but it suits other BAL compliant frame types

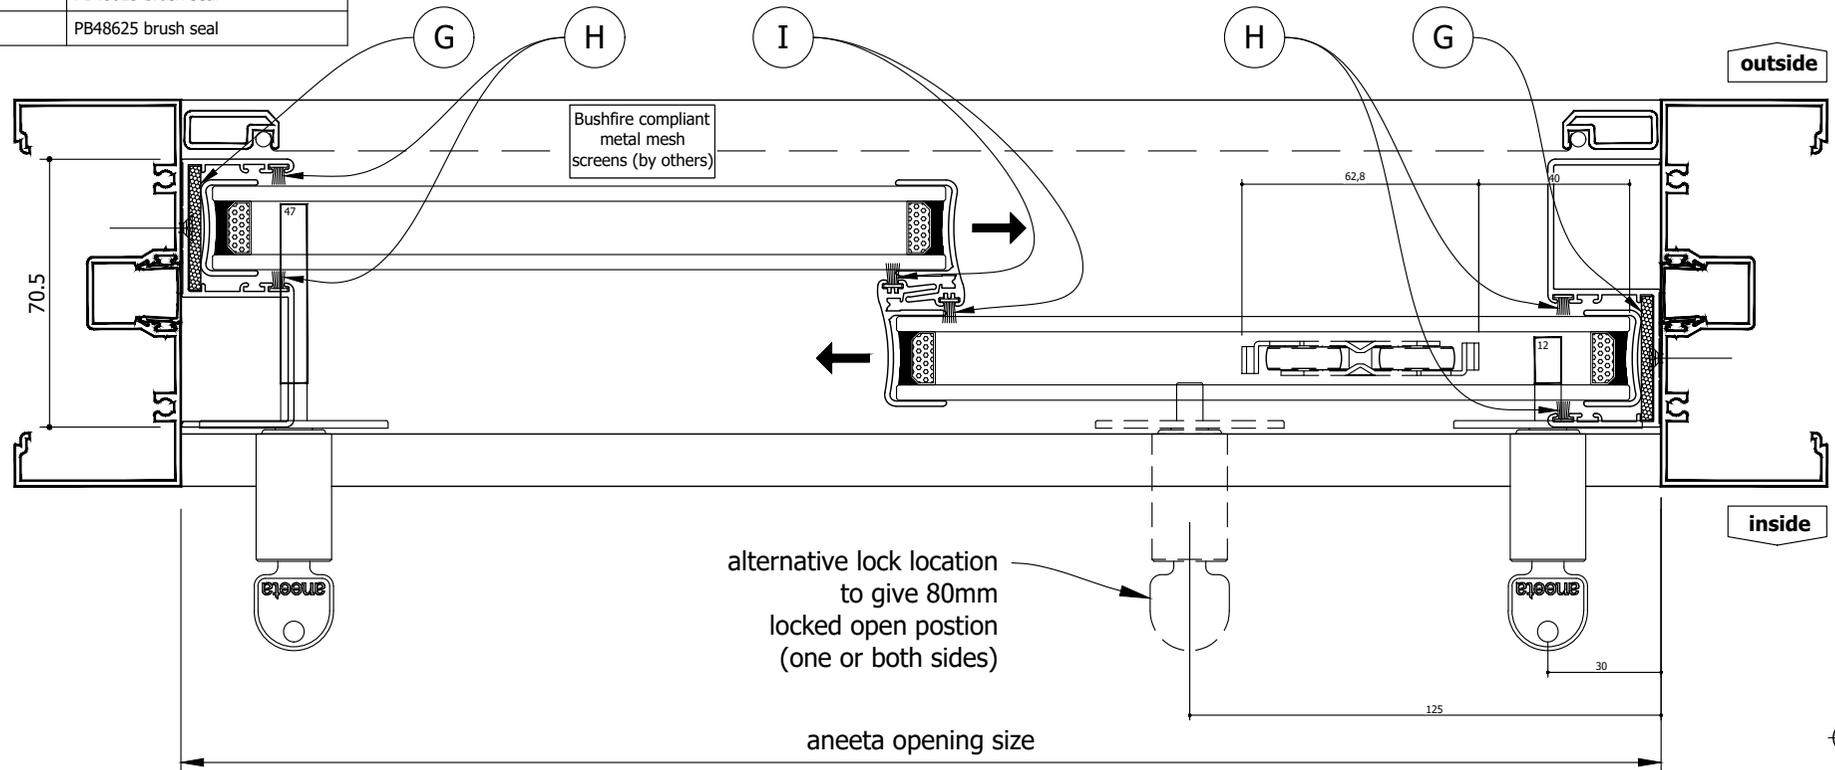

N:\Documentation\Website Downloads\4. Special Applications\2. Bushfire\HSF 2P22 SS A (B) - BAL12.5 to 40 2 pane 22mm DOUBLE GLAZED sashless horizontal sliders in aluminium frames SS.dwg

IF IN DOUBT ASK - DO NOT SCALE DRAWING

Proprietary and confidential The information contained in this drawing is the sole property of Aneeta Australia. Any reproduction in part or as a whole, without the written permission of Aneeta Australia is prohibited.			Title: BAL12.5 to 40 2 pane 22mm DOUBLE GLAZED sashless horizontal sliders in aluminium frames SS horizontal section B-B		 949 Stud Road, Rowville VIC 3178, ABN 80 062 883 729	Material: in Aluminium Frame				
						Finish:				
						Die/Part:				
Rev	Description	Approved By	Date	Drwn:-	Chk: -	Date: -	Scale: 1:2@A4	Sheet 3 of 2	Revision: B	Dwg No: HSF 2P22 SS A
A	Original Issue	SB	Nov2012							
B	Update locks, layout	SE	Jun2024							