




aneeta[®]
A JELD-WEN Company

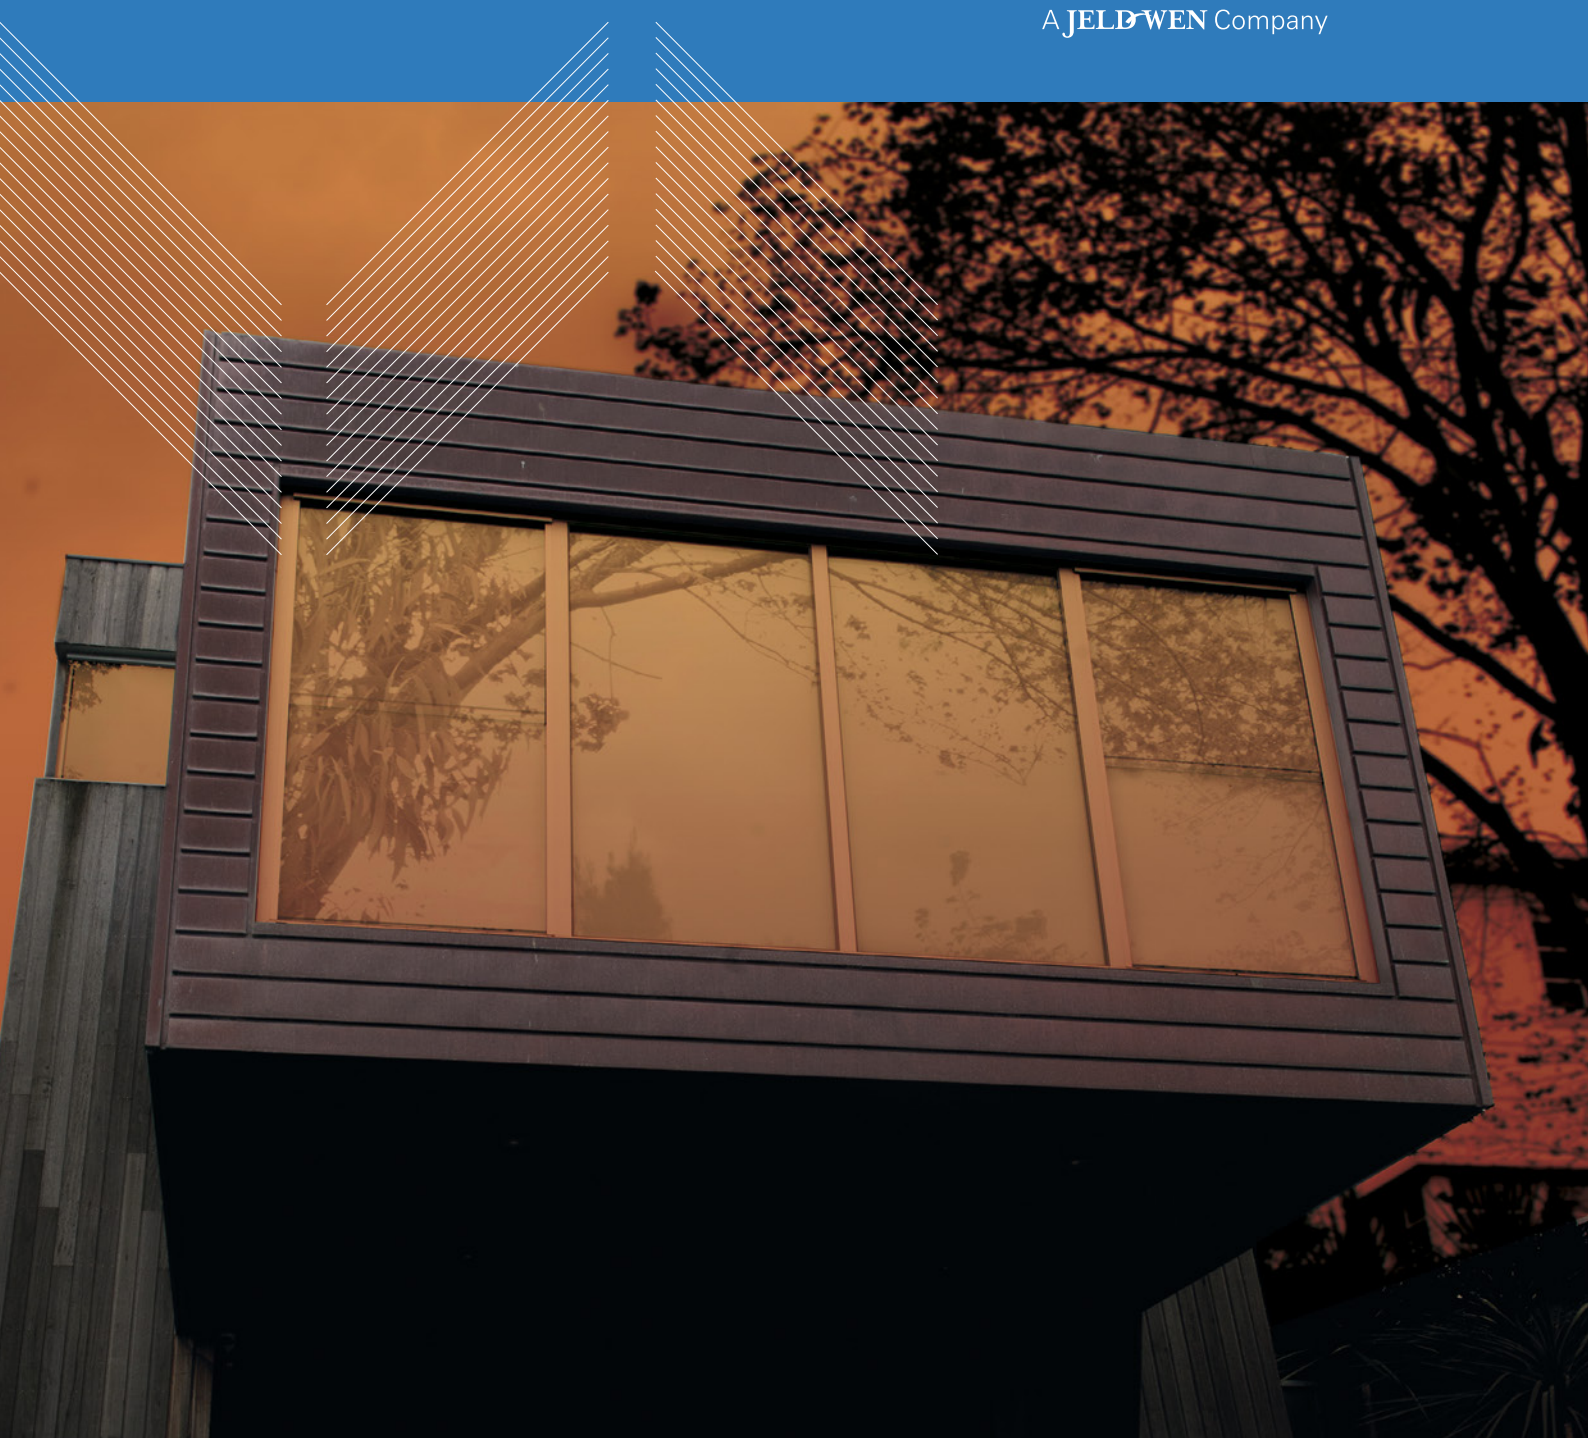

FireSmart[™]
Sashless Windows

Bushfire compliant windows built in an Aneeta way.

The stylish and slim lined Aneeta FireSmart[™] Window is BAL-40 compliant, making it ideal for bushfire prone areas. Designed with sleek framing systems it provides all the safety features of a fire rated window, without compromising style or function.

Specifying Aneeta Sashless Windows in Bushfire-Prone Areas

Aneeta Windows have invested heavily in research and testing to provide the industry with the highest performing sashless window bushfire products available.

The following information is based on Australian Standard AS3959, which applies to sites where a Bushfire Attack Level (BAL) has been determined.

Please seek further information from your local council authorities as variations may exist in your particular location and bushfire circumstance.



Aneeta FireSmart™ Tested F(40) Range

These products have been tested and assessed to a BAL-40 level by an independent bushfire test facility in accordance with AS 1530.8.1.



NATA Accreditation #3277

Aluminium Frames

Vertical Sliders VSF(40)

Size up to 2400mm high (2P) or 3500mm high (3 or 4P) and 1200mm wide

10mm single glazed (clear toughened glass)

2 pane – SS, SF or FS / 3 pane – SSF, SFS, FSS or FSF / 4 pane – FSSF, SFSF or FSFS

16mm double glazed (6/6/4mm clear toughened glass)

2 pane – SS, SF or FS

Horizontal Sliders HSF(40)

Sizes up to 1200mm high and 2400mm wide (2P) or 3500mm wide (3 or 4P)

10mm single glazed (clear toughened glass)

2 pane – SS / 3 pane – SFS or FSF / 4 pane – FSSF, SFSF or FSFS

22mm double glazed (min 4/14/4mm clear toughened glass)

2 pane – SS / 3 pane – SFS

Aneeta FireSmart™ 'Deemed-to-Satisfy' F(DTS) Range

These products have been designed with fire resistant components to suit ranges from BAL-LOW up to BAL-40 as per AS3959. For the benefit of the end user, at a BAL-40 level, Aneeta Windows recommends whenever possible selecting a test based F(40) product over a 'Deemed to Satisfy' F(DTS40) one. The DTS range at BAL-40 has certain components that can increase the sliding stiffness of the window.

Product Range		BAL-LOW	BAL-12.5	BAL-19	BAL-29	BAL-40	BA-FZ
Aneeta FireSmart™ Tested F(40) Range:							
Aluminium Frames	Vertical Sliders - 10 & 16mm (double glazed)	✓	✓	✓	✓	✓	
	Horizontal Sliders - 10 & 22mm (double glazed)	✓	✓	✓	✓	✓	
Aneeta FireSmart™ Deemed-to-Satisfy F(DTS) Range:							
Aluminium Frames	Vertical Sliders - 6mm	✓					
	Vertical Sliders - 10 & 16mm (double glazed)	✓	✓	✓	✓	✓	
	Horizontal Sliders - 6, 10 & 22mm (double glazed)	✓	✓	✓	✓		
Timber Frames	Vertical Sliders - 6mm	✓					
	Vertical Sliders - 10 & 16mm (double glazed)	✓	✓	✓	✓		
	Horizontal Sliders - 6, 10 & 22mm (double glazed)	✓	✓	✓	✓		
Aneeta Standard Product Range:							
Any Aneeta window with bushfire shutters		✓	✓	✓	✓	✓	✓
Any Aneeta window with the complete window externally screened		✓	✓	✓			
Any Aneeta window		✓					

Perimeter frames, bushfire shutters and metal mesh screens (all by others) must also comply with the applicable codes and standards. AS3959 mandates that the openable portions of any window are screened for both Deemed-to-Satisfy and Tested systems.