
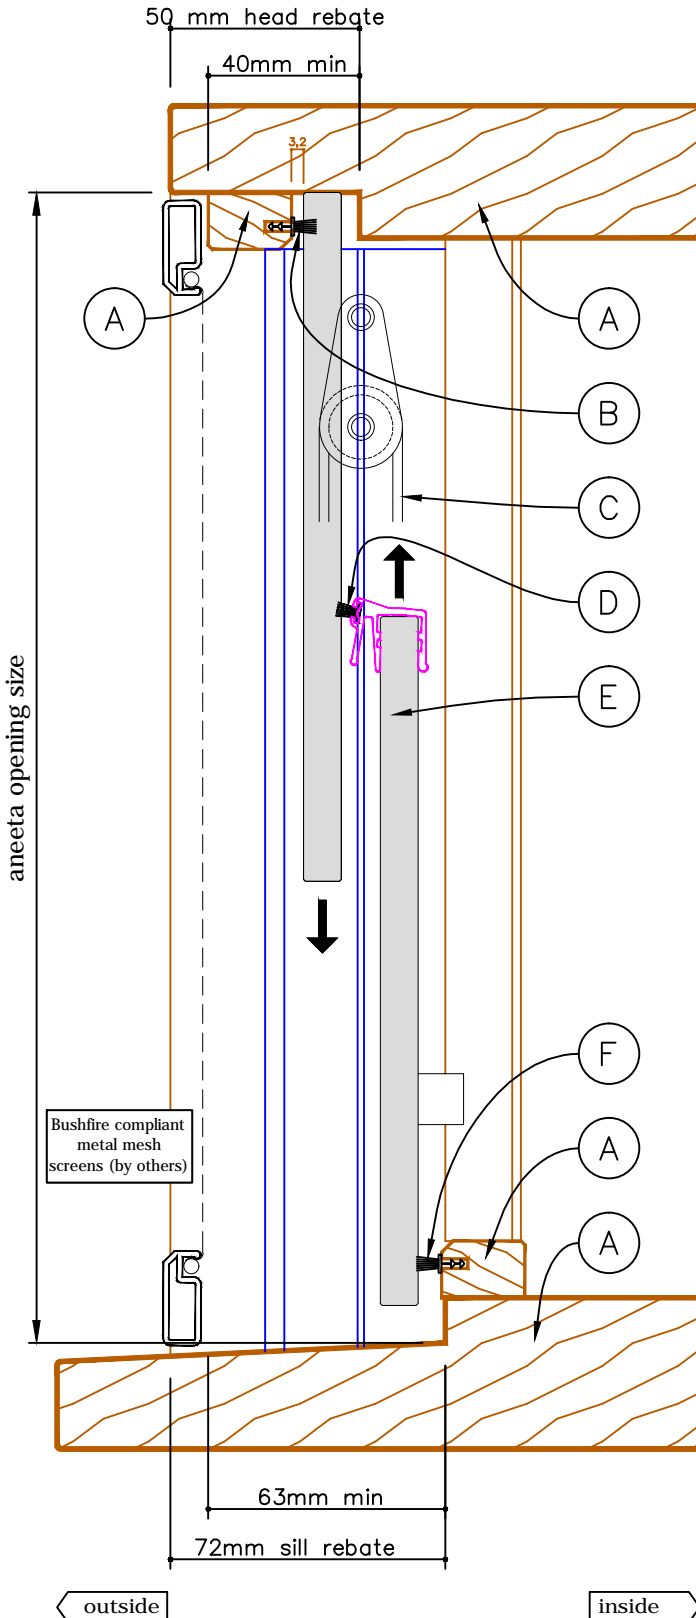


2 pane 10mm sashless double hung in timber frames


with aluminium covers outside, timber covers inside
 vertical section A-A



BAL Part Schedule	
F(DTSxx) - Deemed-to-Satisfy	
No BAL-40 Timber systems available	
(A) FRAME AND JOINERY TIMBER	
F(DTS12.5-19)	timber density of 650 kg/m ³ or greater at a 12% moisture content
F(DTS29)	bushfire-resisting timber
(B) HEAD PILE	
F(DTS12.5-29)	TSF48650 brush seal (black)
(C) CORD	
F(DTS12.5-29)	2mm 7x19 SS wire rope
(D) LAP SEAL	
F(DTS12.5-29)	PBF48625 brush seal (grey)
(E) GLAZING	
F(DTS12.5)	10mm Grade A Safety Glass (i.e Laminated or Toughened)
F(DTS19-29)	10mm Toughened Glass
(F) SILL SEAL	
F(DTS12.5-29)	TSF48650 brush seal (black)


2 pane 10mm sashless double hung in timber frames

with aluminium covers outside, timber covers inside
 horizontal section B-B





BAL Part Schedule	
F(DTSxx) - Deemed-to-Satisfy	
No BAL-40 Timber systems available	
(A) FRAME AND JOINERY TIMBER	
F(DTS12.5-19)	timber density of 650 kg/m ³ or greater at a 12% moisture content
F(DTS29)	bushfire-resisting timber
(C) CORD	
F(DTS12.5-29)	2mm 7x19 SS wire rope
(G) COMBO TEE PILES	
F(DTS12.5-29)	PBF48425 brush seal (black)
(H) SLIDE PILES	
F(DTS12.5-29)	PBF48375 brush seal (black)

(I) SLIDE GUIDE BRUSHES	
F(DTS12.5-29)	TSF48650: 2 x 50mm per slide
(J) SLIDES	
F(DTS12.5-29)	10mm Fire Slides
(K) GRIPPLE	
F(DTS12.5-29)	GRIPPLE No 2 TZ - modified (for SS)
(L) TIMBER COVER PILES	
F(DTS12.5-29)	TSF48650 brush seal (black)

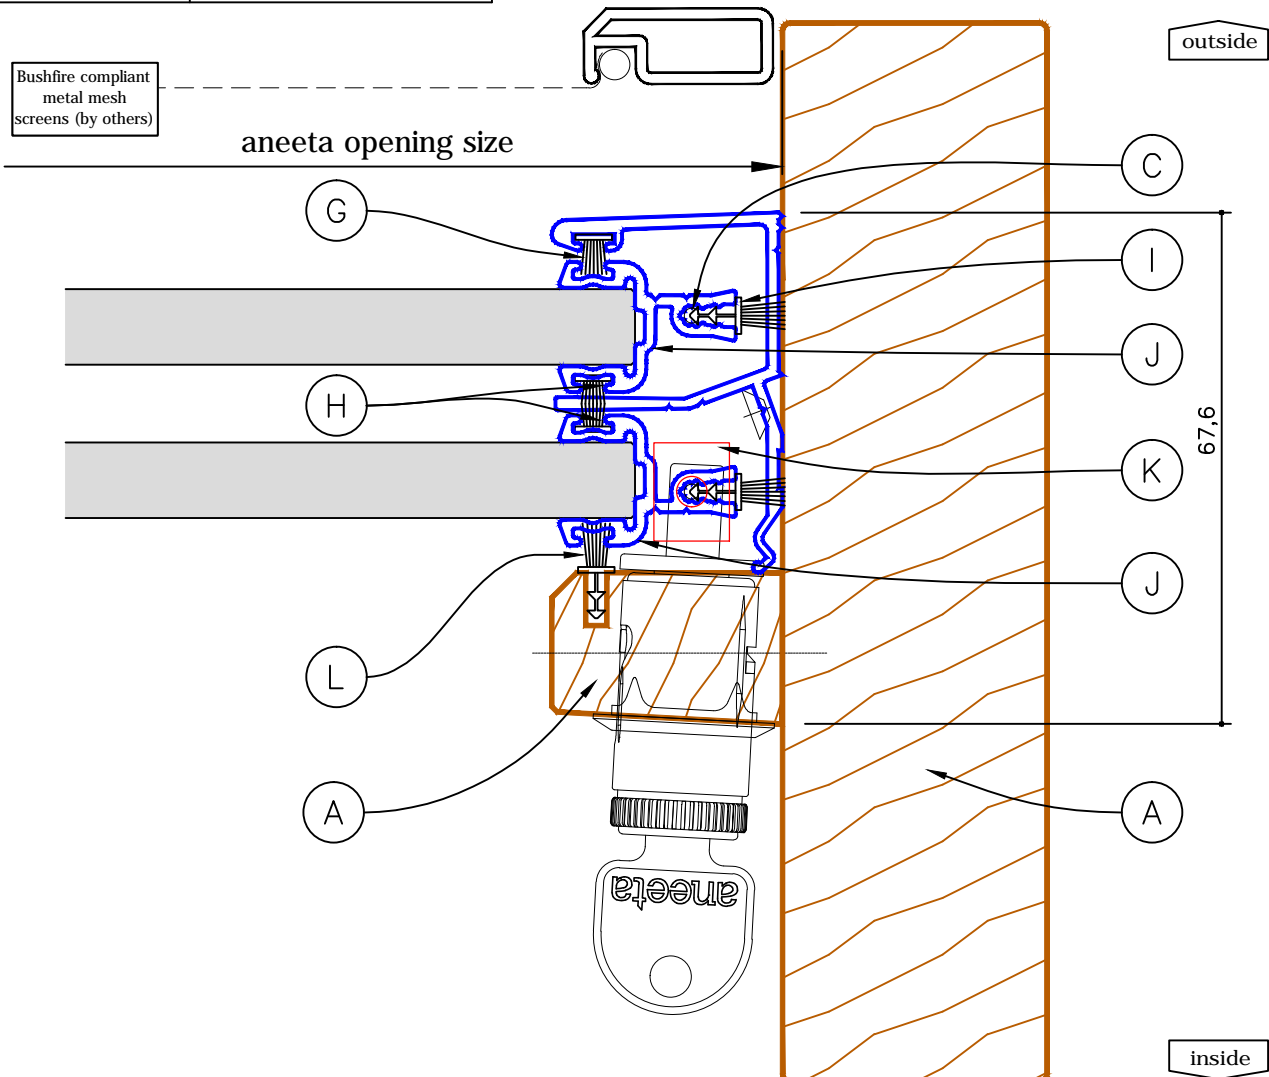


2 pane 10mm sashless double hung in timber frames

with aluminium covers
vertical section A-A

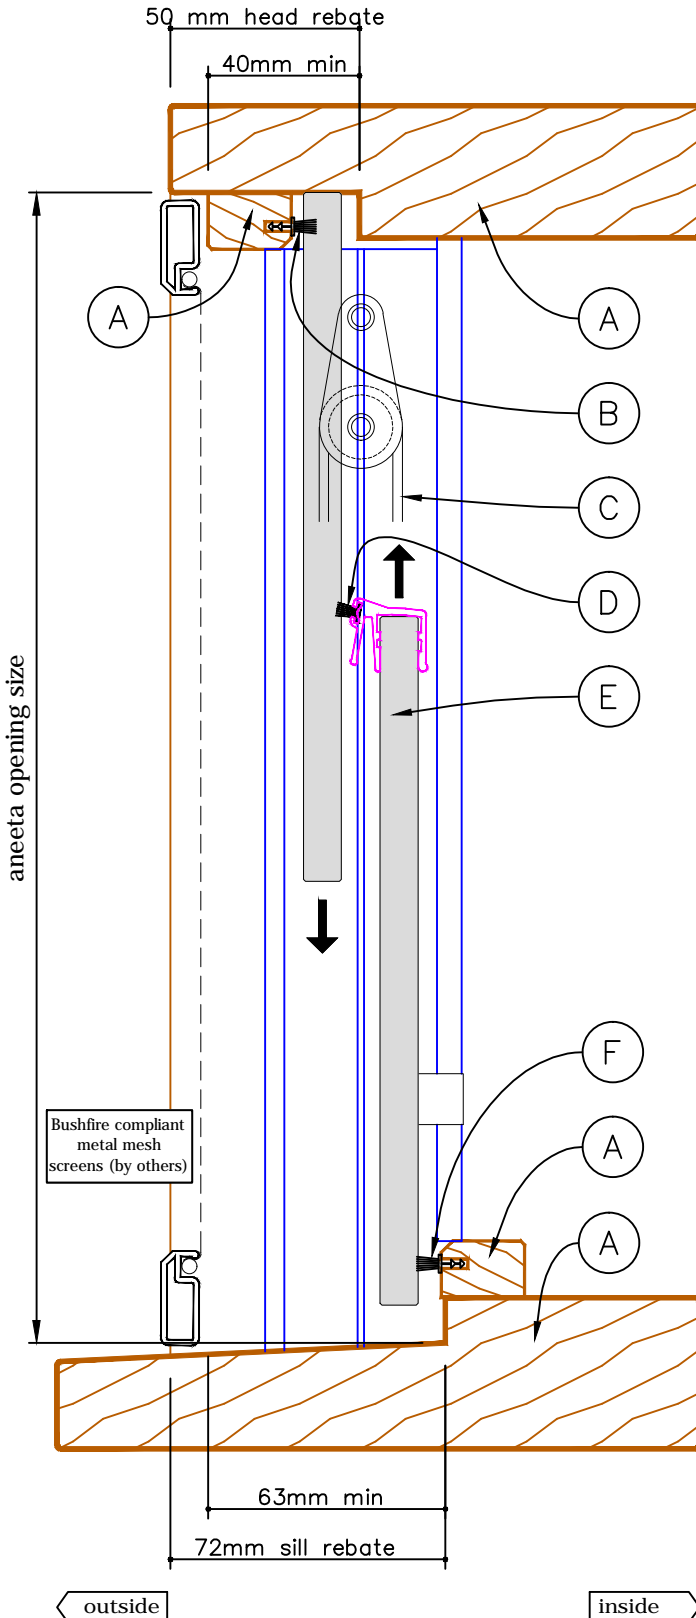


BAL Part Schedule	
F(DTSxx) - Deemed-to-Satisfy	
No BAL-40 Timber systems available	
(A) FRAME AND JOINERY TIMBER	
F(DTS12.5-19)	timber density of 650 kg/m ³ or greater at a 12% moisture content
F(DTS29)	bushfire-resisting timber
(B) HEAD PILE	
F(DTS12.5-29)	TSF48650 brush seal (black)
(C) CORD	
F(DTS12.5-29)	2mm 7x19 SS wire rope
(D) LAP SEAL	
F(DTS12.5-29)	PBF48625 brush seal (grey)
(E) GLAZING	
F(DTS12.5)	10mm Grade A Safety Glass (i.e Laminated or Toughened)
F(DTS19-29)	10mm Toughened Glass
(F) SILL SEAL	
F(DTS12.5-29)	TSF48650 brush seal (black)

2 pane 10mm sashless double hung in timber frames with aluminium covers horizontal section B-B





BAL Part Schedule	
F(DTSxx) - Deemed-to-Satisfy	
No BAL-40 Timber systems available	
(A) FRAME AND JOINERY TIMBER	
F(DTS12.5-19)	timber density of 650 kg/m ³ or greater at a 12% moisture content
F(DTS29)	bushfire-resisting timber
(C) CORD	
F(DTS12.5-29)	2mm 7x19 SS wire rope
(G) COMBO TEE & COVER PILES	
F(DTS12.5-29)	PBF48425 brush seal (black)
(H) SLIDE PILES	
F(DTS12.5-29)	PBF48375 brush seal (black)

(I) SLIDE GUIDE BRUSHES	
F(DTS12.5-29)	TSF48650: 2 x 50mm per slide
(J) SLIDES	
F(DTS12.5-29)	10mm Fire Slides
(K) GRIPPLE	
F(DTS12.5-29)	GRIPPLE No 2 TZ - modified (for SS)

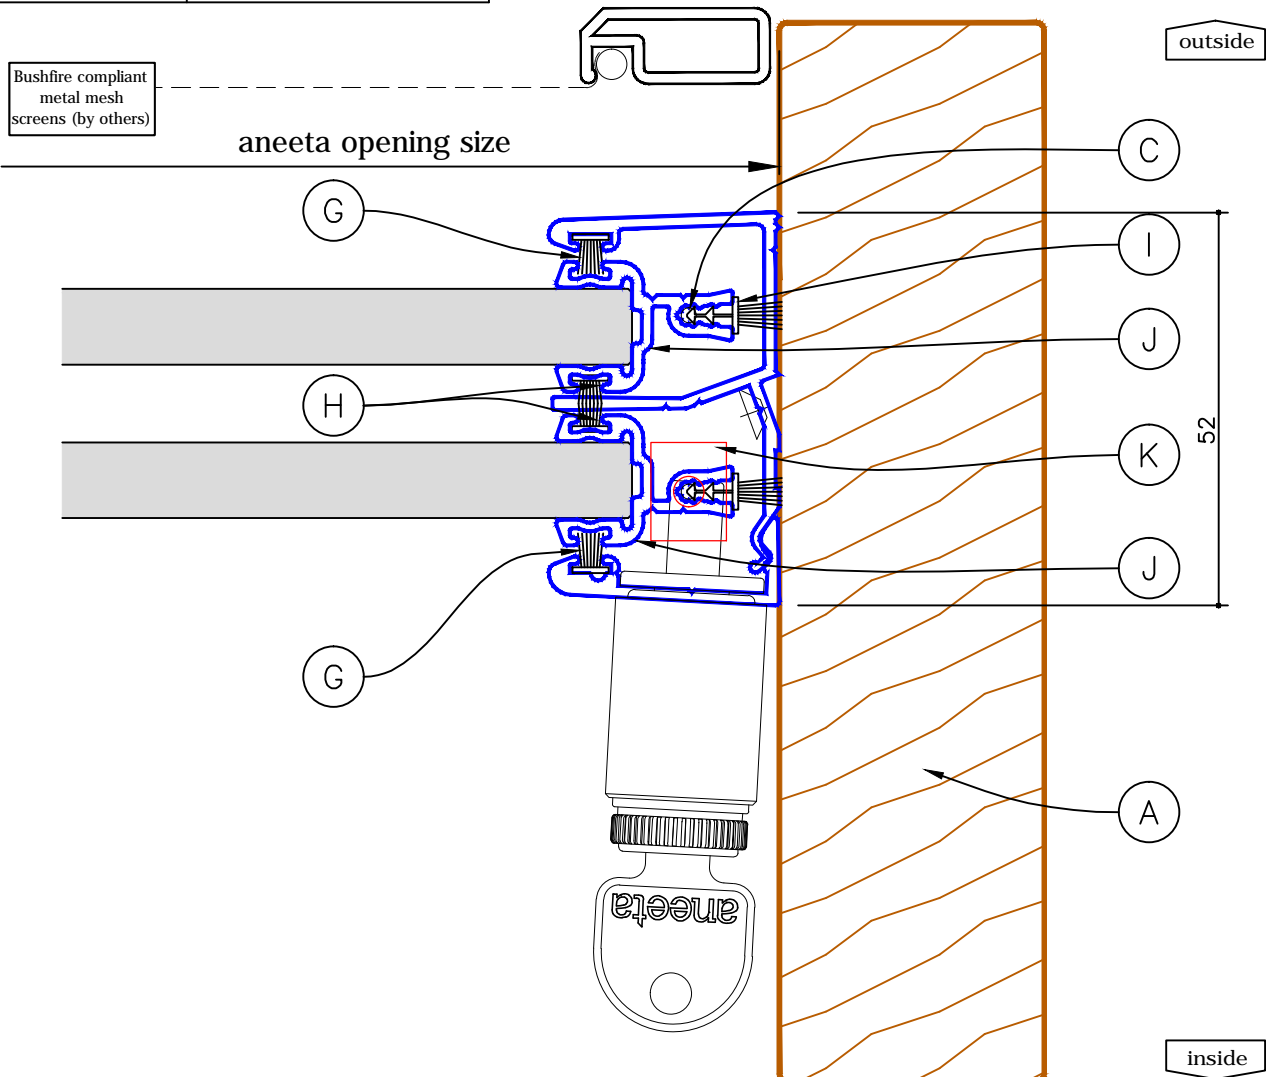


2 pane 10mm sashless double hung in timber frames

with timber covers
vertical section A-A

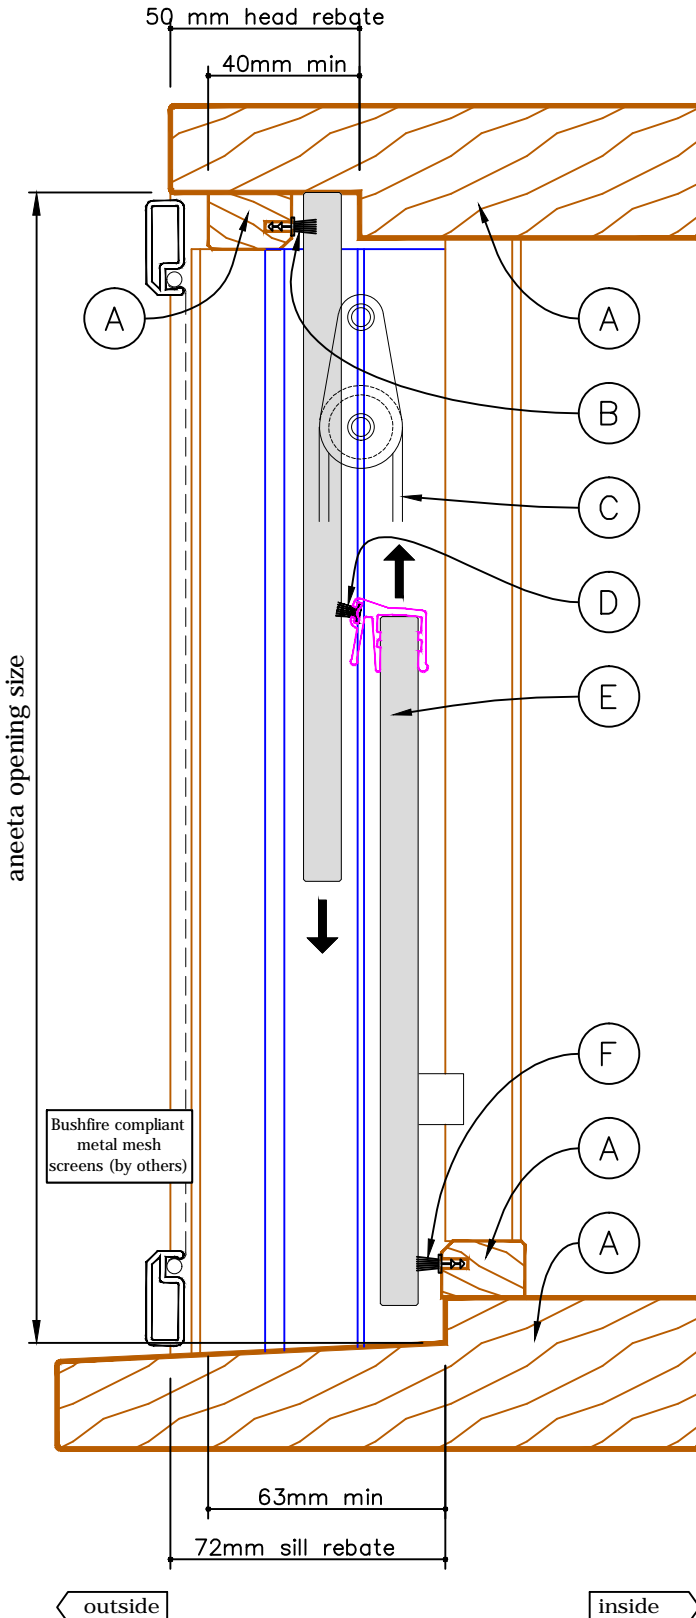

BAL Part Schedule	
F(DTSxx) - Deemed-to-Satisfy	
No BAL-40 Timber systems available	
(A) FRAME AND JOINERY TIMBER	
F(DTS12.5-19)	timber density of 650 kg/m ³ or greater at a 12% moisture content
F(DTS29)	bushfire-resisting timber
(B) HEAD PILE	
F(DTS12.5-29)	TSF48650 brush seal (black)
(C) CORD	
F(DTS12.5-29)	2mm 7x19 SS wire rope
(D) LAP SEAL	
F(DTS12.5-29)	PBF48625 brush seal (grey)
(E) GLAZING	
F(DTS12.5)	10mm Grade A Safety Glass (i.e Laminated or Toughened)
F(DTS19-29)	10mm Toughened Glass
(F) SILL SEAL	
F(DTS12.5-29)	TSF48650 brush seal (black)

2 pane 10mm sashless double hung in timber frames with timber covers horizontal section B-B



BAL Part Schedule	
F(DTSxx) - Deemed-to-Satisfy	
No BAL-40 Timber systems available	
(A) FRAME AND JOINERY TIMBER	
F(DTS12.5-19)	timber density of 650 kg/m ³ or greater at a 12% moisture content
F(DTS29)	bushfire-resisting timber
(C) CORD	
F(DTS12.5-29)	2mm 7x19 SS wire rope
(G) COMBO TEE PILES	
F(DTS12.5-29)	PBF48425 brush seal (black)
(H) SLIDE PILES	
F(DTS12.5-29)	PBF48375 brush seal (black)

(I) SLIDE GUIDE BRUSHES	
F(DTS12.5-29)	TSF48650: 2 x 50mm per slide
(J) SLIDES	
F(DTS12.5-29)	10mm Fire Slides
(K) GRIPPLE	
F(DTS12.5-29)	GRIPPLE No 2 TZ - modified (for SS)
(L) TIMBER COVER PILES	
F(DTS12.5-29)	TSF48650 brush seal (black)

Bushfire compliant metal mesh screens (by others)

