
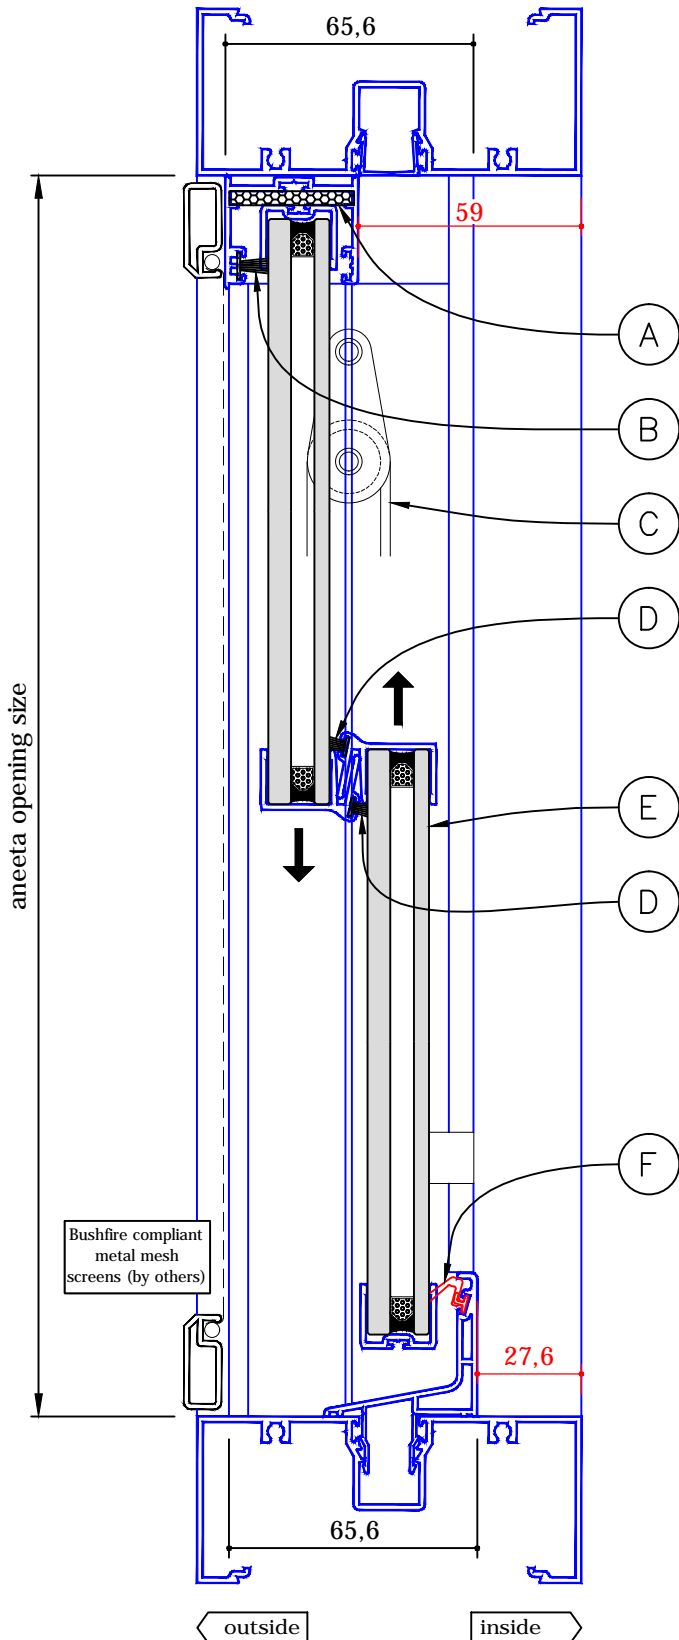


2 pane 16mm double hung in aluminium frames (double glazed- Interlocking model)

with aluminium covers
 vertical section A-A




BAL Part Schedule	
F(DTSxx) - Deemed-to-Satisfy F(40) - BAL40 (based on testing)	
(A) HEAD FOAM	
F(DTS12.5-29)	FS473x33 foam seal (black)
F(DTS40)	SS512AF4 3x31 foam seal (grey)
F(40)	FS473x33 foam seal (black)
(B) HEAD PILE	
F(DTS12.5-29)	PBF69900 brush seal (black)
F(DTS40)	Omit seal
F(40)	PBF69900 brush seal (black)
(C) CORD	
F(DTS12.5-40)	2mm 7x19 SS wire rope
F(40)	2mm 7x19 SS wire rope
(D) MEETING RAILS	
F(DTS12.5-29)	PB48625 brush seal
F(DTS40)	FRTE24 fire seal
F(40)	PB48625 brush seal
(E) GLAZING	
F(DTS12.5)	4mm (min.) Grade A Safety Glass (laminated or toughened) Outer Pane
F(DTS19-29)	5mm (min.) Toughened Glass Outer Pane
F(DTS40)	6mm Toughened Glass Outer Pane
F(40)	6/6/4 Clear Toughened Glass (1200mm max. height) (1200mm max. width)
(F) SILL SEAL	
F(DTS12.5-29)	QEZ48
F(DTS40)	QEZ48FR Intumescent fire seal
F(40)	QEZ48FR Intumescent fire seal

aneeta insert is shown here in 100mm commercial framing but it suits other BAL compliant frame types

2 pane 16mm double hung in aluminium frames (double glazed- Interlocking model)

with aluminium covers
 horizontal section B-B



BAL Part Schedule	
F(DTSxx) - Deemed-to-Satisfy F(40) - BAL40 (based on testing)	
(C) CORD	
F(DTS12.5-40)	2mm 7x19 SS wire rope
F(40)	2mm 7x19 SS wire rope
(G) COMBO TEE AND COVER PILES	
F(DTS12.5-29)	PBF48525 brush seal (black)
F(DTS40)	FRTE23 fire seal
F(40)	PBF48525 brush seal (black)
(H) CENTRE FIN PILES	
F(DTS12.5-29)	PBF48375 brush seal (black)
F(DTS40)	FRTE23 fire seal
F(40)	PBF48375 brush seal (black)

(I) SLIDE GUIDE BRUSHES	
F(DTS12.5-40)	TSF48650: 2 x 50mm per slide
F(40)	TSF48650: 2 x 50mm per slide
(J) SLIDES	
F(DTS12.5-40)	16mm Fire Slides
F(40)	16mm Fire Slides
(K) GRIPPLE	
F(DTS12.5-40)	GRIPPLE No 2 TZ - modified (for SS)
F(40)	GRIPPLE No 2 TZ - modified (for SS)

