



aneeta®

A JELD-WEN Company


Duomode.

Prevent falls,
not freedom.



Duomode.


Safety and style in one.

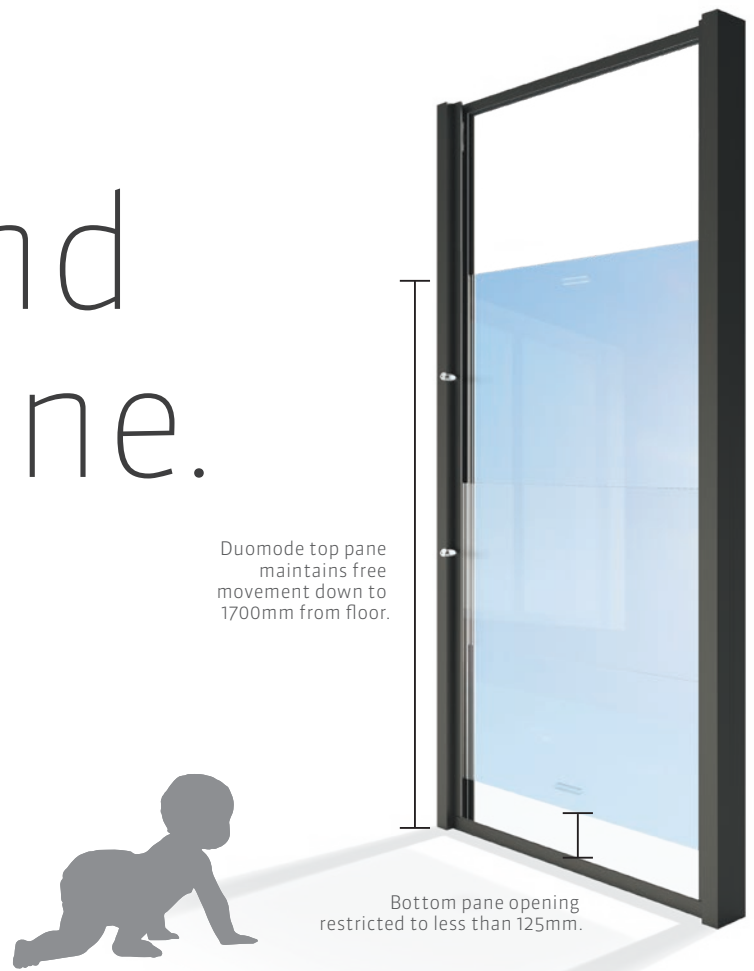

- Each year, thousands of children are hospitalised after falls from windows or balconies.
- The Building Code of Australia (BCA) requires, that windows two metres or higher above ground, feature openings no larger than 125mm (the diameter of a small child's head).
- Available in two pane configuration, the Duomode fall prevention window allows one pane to be restricted at 125mm, while still allowing independent operation of the top pane (sliding down to no lower than 1700mm from the floor).
- This means children and pets are protected, while you still enjoy the benefits of maximum ventilation.
- So you can safe guard against falls while still enjoying natural ventilation, easy cleaning and unobstructed views.

Item	Specification
Glazing	– 6 or 10mm Single Glazed – 16mm Double Glazed – Pane size limitations determined by glass type
Pane Configuration	2 pane Featuring independent movement
Locking position	1 standard locking position, Closed (minimum 2 locks required). Extra locking positions are available upon request
Weather Performance	38mm sill – 300pa 71mm sill – 800pa
Testing	Tested to AS4420 and conforms with AS2047 Complies to – AS1288 Human Impact – NSW Strata Scheme
Fall Prevention Compliance	Opening pane below 1700mm restricted to 125mm opening to comply with code, while operation of top pane is independent and opens to 1700mm from floor level
Sashless window box sections can be fitted to	Timber, aluminium, PVC and steel windows frames
Colour Range	Aluminium box sections can be powder coated to complement or contrast your window frames
Patent	295901831

BCA Safety Requirement.



Aneeta Window Systems
1800 653 207
sales@aneetawindows.com
aneetawindows.com
Australia, New Zealand, USA,
Mexico, Singapore, Philippines,
Thailand, India.
JWANAT0326/0318 FSA/AWS0106

