DOUBLE GLAZED PRODUCT

aneeta

4 pane 16mm double hung in aluminium frames (double glazed- CLEARSTEP model)

with aluminium covers
vertical section A-A

121,5

86,3

head (by others)
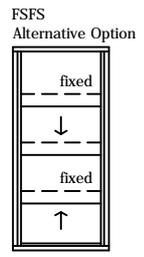
VS 16mm head
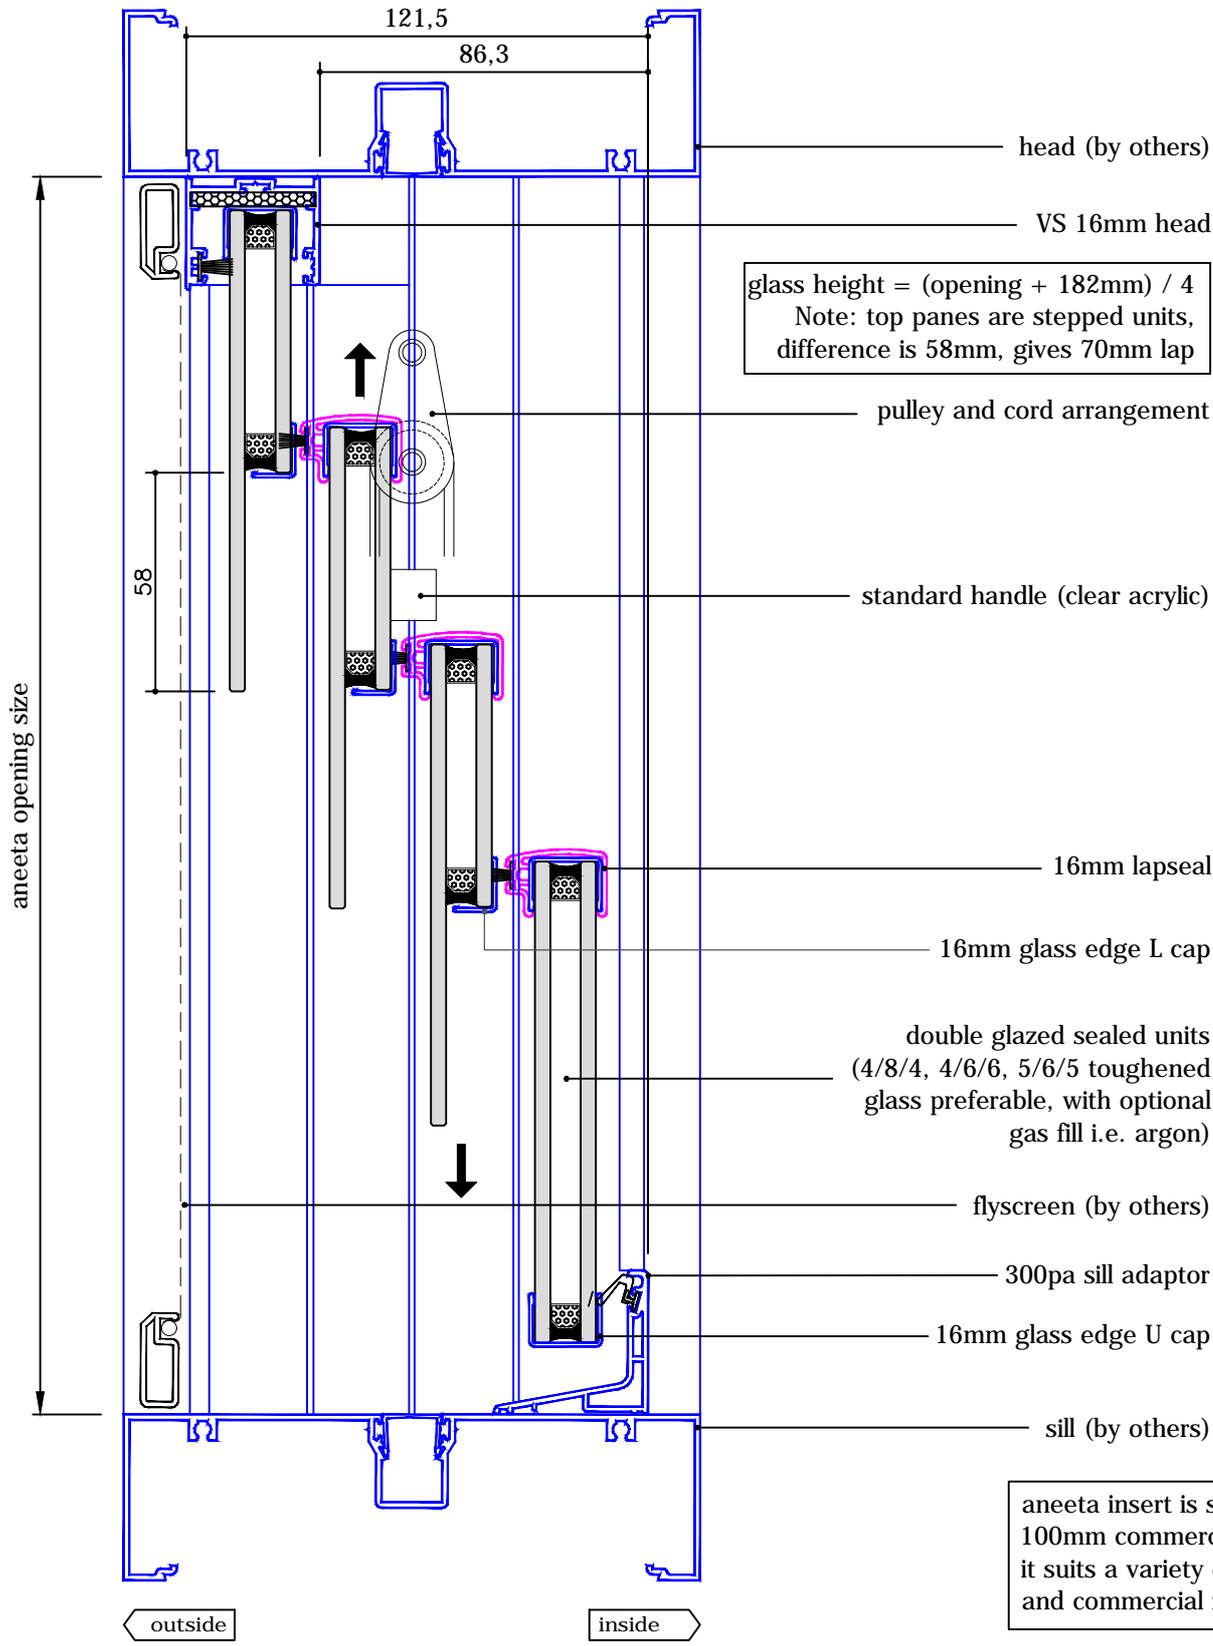
glass height = (opening + 182mm) / 4
Note: top panes are stepped units,
difference is 58mm, gives 70mm lap

pulley and cord arrangement

58

standard handle (clear acrylic)

aneeta opening size

16mm lapseal

16mm glass edge L cap

double glazed sealed units
(4/8/4, 4/6/6, 5/6/5 toughened
glass preferable, with optional
gas fill i.e. argon)

flyscreen (by others)

300pa sill adaptor

16mm glass edge U cap

sill (by others)

outside   inside
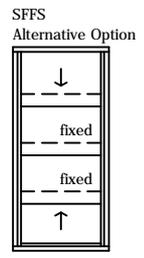
aneeta insert is shown here in
100mm commercial framing but
it suits a variety of residential
and commercial frame types

A ⌐

FSuSdF
(outside view)

| fixed |
| ↑ |
| ↓ |
| fixed |

A ⌐

FSdSuF
Alternative Option

| fixed |
| ↓ |
| ↑ |
| fixed |

SFSF
Alternative Option

| ↓ |
| fixed |
| ↑ |
| fixed |

FSFS
Alternative Option

| fixed |
| ↓ |
| fixed |
| ↑ |

SFFS
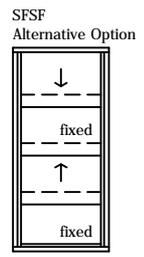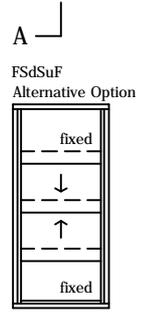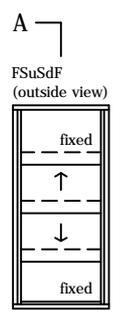Alternative Option

| ↓ |
| fixed |
| fixed |
| ↑ |

4 pane 16mm double hung in aluminium frames

(double glazed- CLEARSTEP model)

with aluminium covers
horizontal section B-B

glass width = opening - 40mm

SFFS
Alternative Option

FSFS
Alternative Option

SFSF
Alternative Option

FSdSuF
Alternative Option

FSuSdF
(outside view)

aneeta opening size

flyscreen (optional by others)

16mm combination tee

top pane

outside

119,5

bottom pane

alumnium cover

16mm multipane tee

lock

flush filler (by others)

jamb (by others)

inside

aneeta insert is shown here in 150mm commercial framing but it suits a variety of residential and commercial frame types

For Technical Assistance Call
1800 653 207