
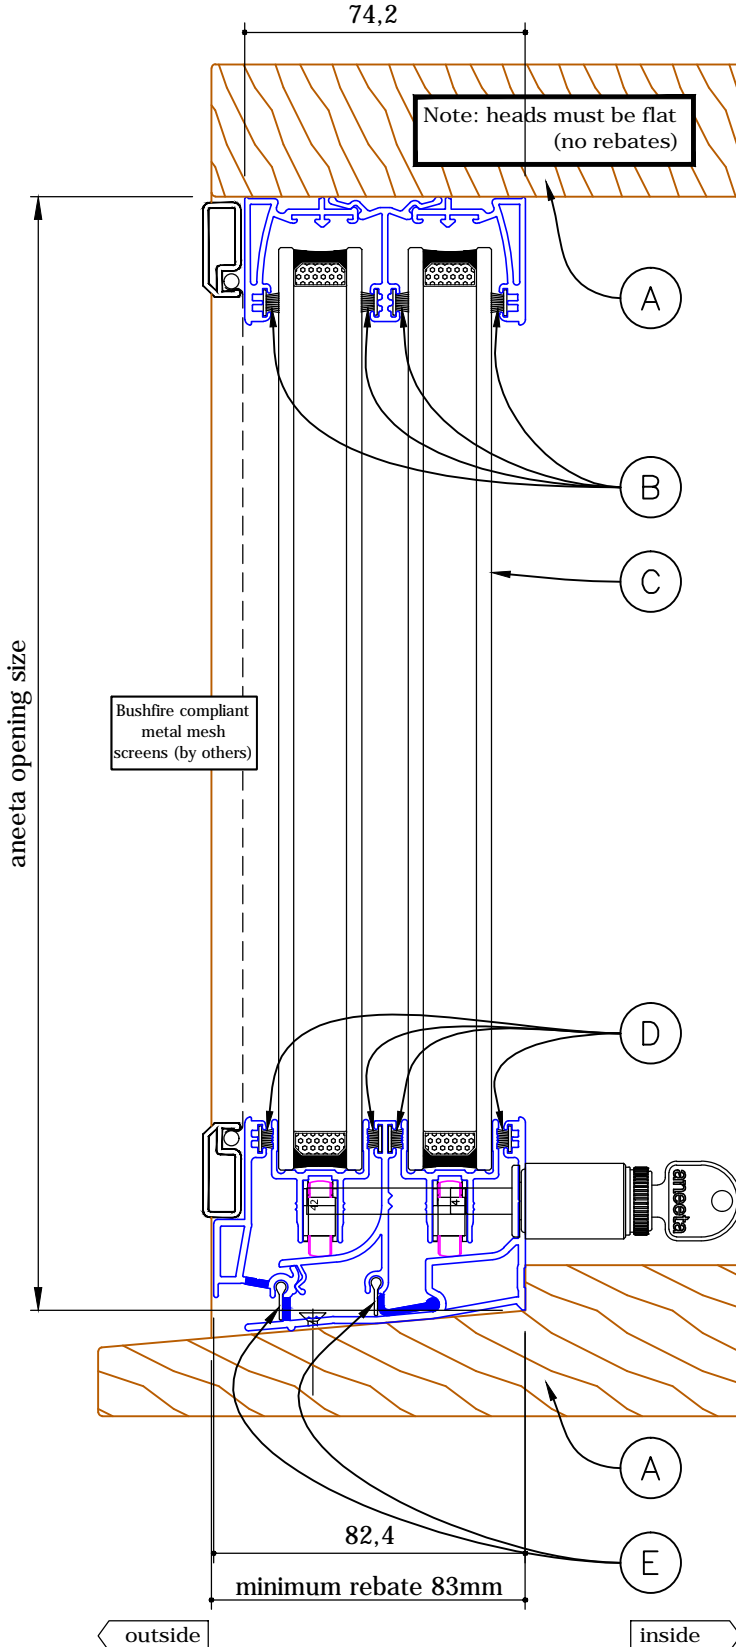


# 2 pane 22mm horizontal slider 300 series in timber frames

vertical section A-A




BAL Part Schedule	
F(DTSxx) - Deemed-to-Satisfy No BAL-40 Timber system available	
<b>(A) FRAME AND JOINERY TIMBER</b>	
F(DTS12.5-19)	timber density of 650 kg/m <sup>3</sup> or greater at a 12% moisture content
F(DTS29)	bushfire-resisting timber
<b>(B) HEAD BASE &amp; CENTRE HEAD PILES</b>	
F(DTS12.5-29)	PBF69425 brush seal
<b>(C) GLAZING</b>	
F(DTS12.5)	4mm (min.) Grade A Safety Glass (laminated or toughened) Outer Pane
F(DTS19-29)	5mm (min.) Toughened Glass Outer Pane
<b>(D) SILL BASE &amp; SILL INSERT PILES</b>	
F(DTS12.5-29)	PBF69375 brush seal
<b>(E) SILL BASE FLAP SEALS</b>	
F(DTS12.5-29)	3153 Santoprene flap seal

# 2 pane 22mm horizontal slider 300 series in timber frames horizontal section B-B

drawing: HSF(-) 2P22 SS T h  
 revision: 0  
 date: Mar 2013

**BUSHFIRE**



<b>(H) JAMB PILES</b>	
F(DTS12.5-29)	PBF48525 brush seal
<b>(I) MEETING RAILS</b>	
F(DTS12.5-29)	PB48625 brush seal

<b>BAL Part Schedule</b>	
F(DTSxx) - Deemed-to-Satisfy No BAL-40 Timber system available	
<b>(A) FRAME AND JOINERY TIMBER</b>	
F(DTS12.5-19)	timber density of 650 kg/m <sup>3</sup> or greater at a 12% moisture content
F(DTS29)	bushfire-resisting timber
<b>(G) JAMB FOAM</b>	
F(DTS12.5-29)	FS473x33 foam seal

