
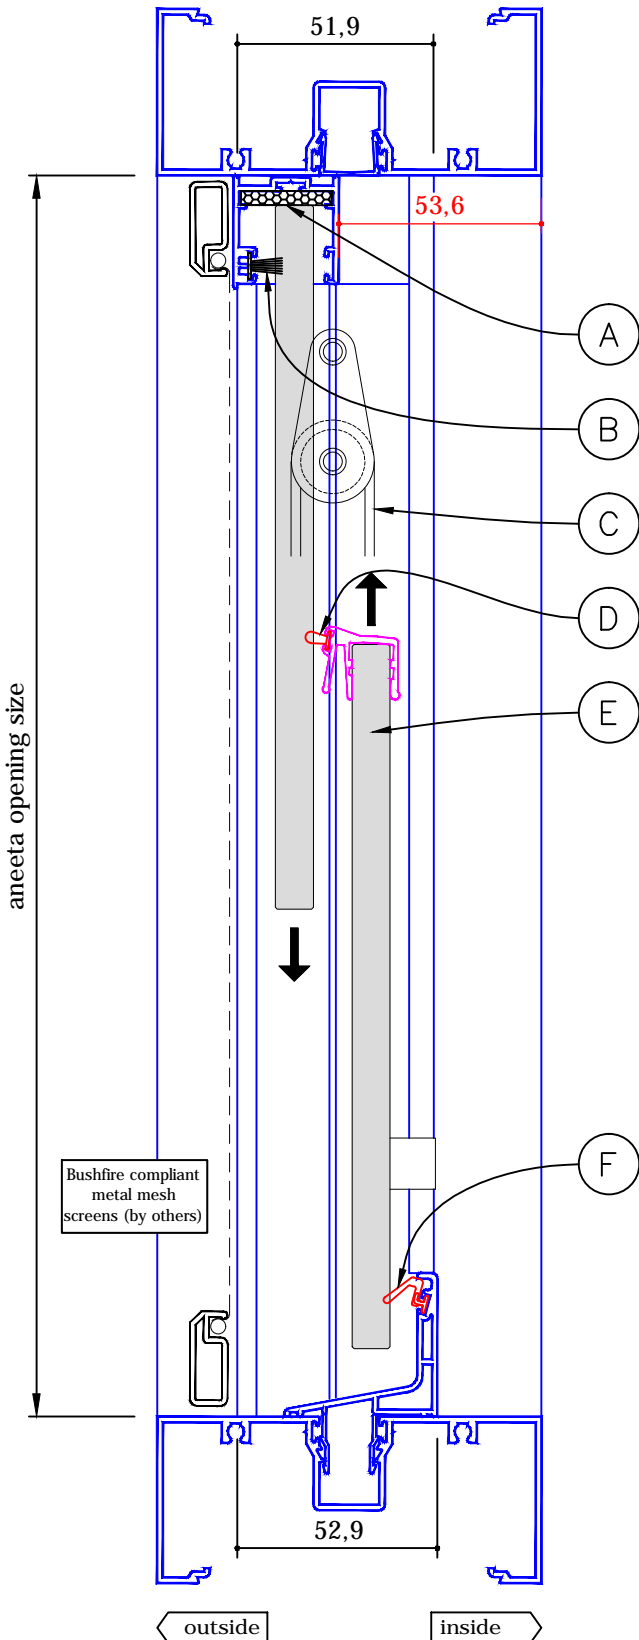


2 pane 10mm sashless double hung in aluminium frames


with aluminium covers
vertical section A-A



BAL Part Schedule	
F(DTSxx) - Deemed-to-Satisfy	
F(40) - BAL40 (based on testing)	
(A) HEAD FOAM	
F(DTS12.5-29)	FS473x24 foam seal (black)
F(DTS40)	SS512AF4 3x24 foam seal (grey)
F(40)	FS473x24 foam seal (black)
(B) HEAD PILE	
F(DTS12.5-29)	PBF69900 brush seal (black)
F(DTS40)	Omit seal
F(40)	PBF69900 brush seal (black)
(C) CORD	
F(DTS12.5-40)	2mm 7x19 SS wire rope
F(40)	2mm 7x19 SS wire rope
(D) LAP SEAL	
F(DTS12.5-29)	PBF48625 brush seal (grey)
F(DTS40)	QL48650FR intumescent fire seal
F(40)	QL48650FR intumescent fire seal
(E) GLAZING	
F(DTS12.5)	10mm Grade A Safety Glass (i.e Laminated or Toughened)
F(DTS19-40)	10mm Toughened Glass
F(40)	10mm Clear Toughened Glass (1200mm max. width, 1200mm max. height)
(F) SILL SEAL	
F(DTS12.5-29)	QEZ48
F(DTS40)	QEZ48FR Intumescent fire seal
F(40)	QEZ48FR Intumescent fire seal

aneeta insert is shown here in 100mm commercial framing but it suits other BAL compliant frame types

2 pane 10mm sashless double hung in aluminium frames with aluminium covers horizontal section B-B



BAL Part Schedule	
F(DTSxx) - Deemed-to-Satisfy F(40) - BAL40 (based on testing)	
(C) CORD	
F(DTS12.5-40)	2mm 7x19 SS wire rope
F(40)	2mm 7x19 SS wire rope
(G) COMBO TEE AND COVER PILES	
F(DTS12.5-29)	PBF48425 brush seal (black)
F(DTS40)	FRTE23 fire seal
F(40)	PBF48425 brush seal (black)
(H) SLIDE PILES	
F(DTS12.5-29)	PBF48375 brush seal (black)
F(DTS40)	FRTE23 fire seal
F(40)	PBF48375 brush seal (black)

(I) SLIDE GUIDE BRUSHES	
F(DTS12.5-40)	TSF48650: 2 x 50mm per slide
F(40)	TSF48650: 2 x 50mm per slide
(J) SLIDES	
F(DTS12.5-40)	10mm Fire Slides
F(40)	10mm Fire Slides
(K) GRIPPLE	
F(DTS12.5-40)	GRIPPLE No 2 TZ - modified (for SS)
F(40)	GRIPPLE No 2 TZ - modified (for SS)

