

(4/8/4, 4/6/6, 5/6/5 toughened glass preferable, with optional

gas fill i.e. argon)

draughtstrip

flyscreen (by others)

16mm top/bottom rail

outside

<u>92mm min</u> 104mm sill rebate


inside

drawing: VS 3P16 FSF T h - larg		
revision: 2 date: Jun 2013	DOUBLE GLAZED PRODUC	T aneeta
(middle pane moving - large with aluminium covers horizontal section B-B glass width = opening - 130mm		er frames
	eta opening size	
flyscreen (optional by others) ——		outside
16mm combination tee		
top pane		
bottom pane		op



3 pane servery 16mm double hung in timber frames (middle pane moving - extra large box, double glazed - Interlocking model)

with aluminium covers vertical section A-A

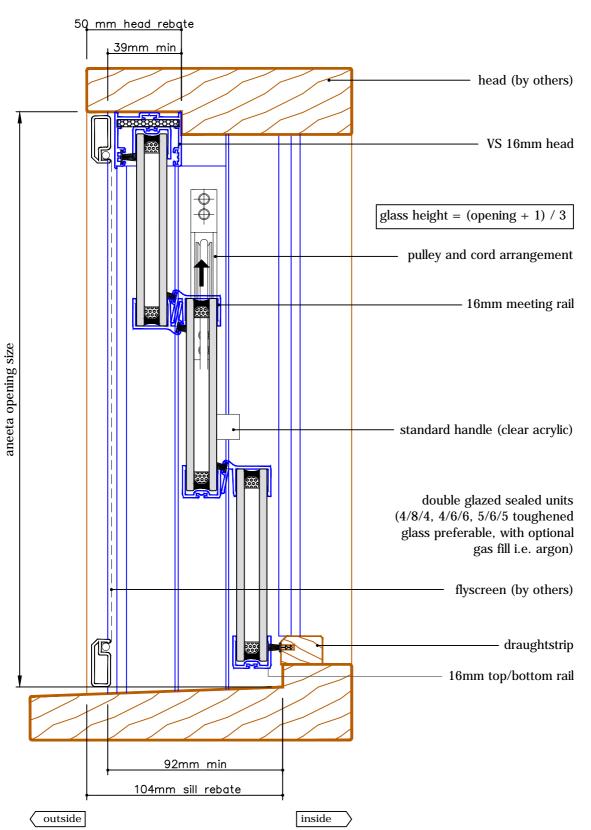

(outside view

Î

fixed

fixed

fixed

Ť

fixed

A — FSdF Alternative Option

