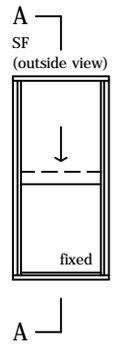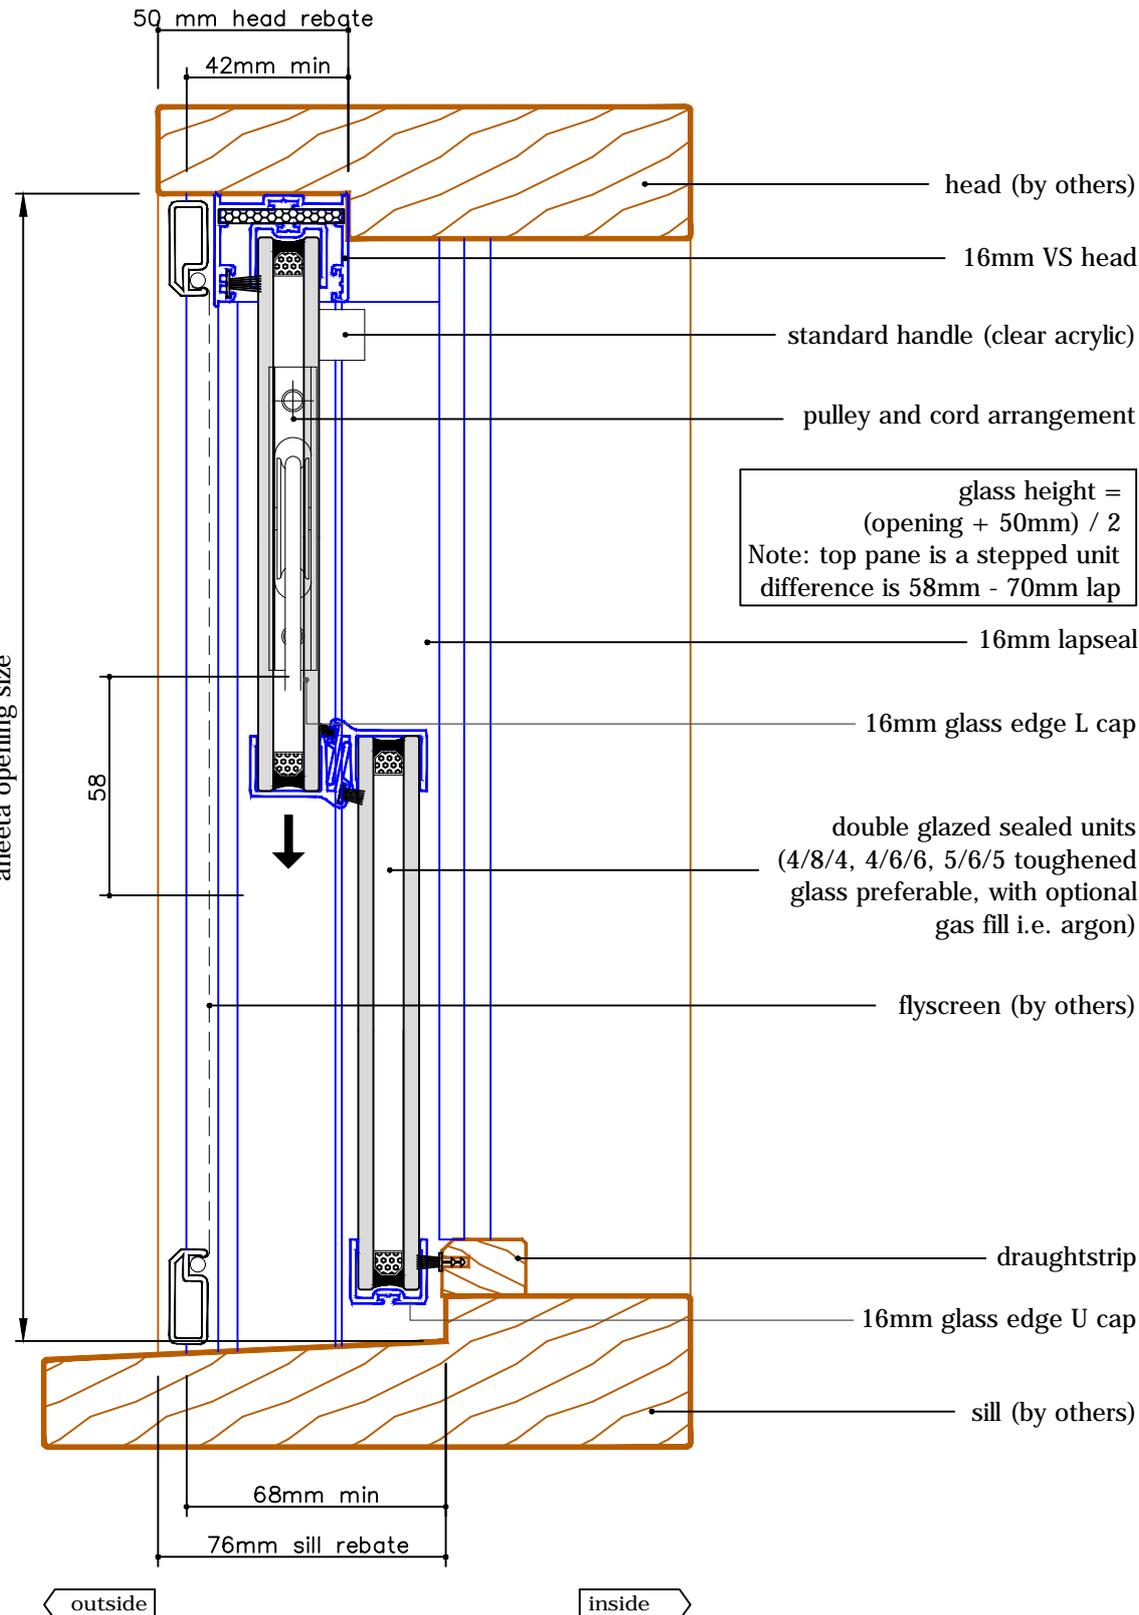# DOUBLE GLAZED PRODUCT

aneeta

2 pane servery 16mm double hung in timber frames

(bottom pane fixed - medium box, double glazed - CLEARSTEP model)

with aluminium covers
vertical section A-A

A
SF
(outside view)

fixed

A

50 mm head rebate

42mm min

head (by others)

16mm VS head

standard handle (clear acrylic)

pulley and cord arrangement

glass height =
(opening + 50mm) / 2
Note: top pane is a stepped unit
difference is 58mm - 70mm lap

16mm lapseal

16mm glass edge L cap

aneeta opening size

58

double glazed sealed units
(4/8/4, 4/6/6, 5/6/5 toughened
glass preferable, with optional
gas fill i.e. argon)

flyscreen (by others)

draughtstrip

16mm glass edge U cap

sill (by others)

68mm min

76mm sill rebate

outside

inside

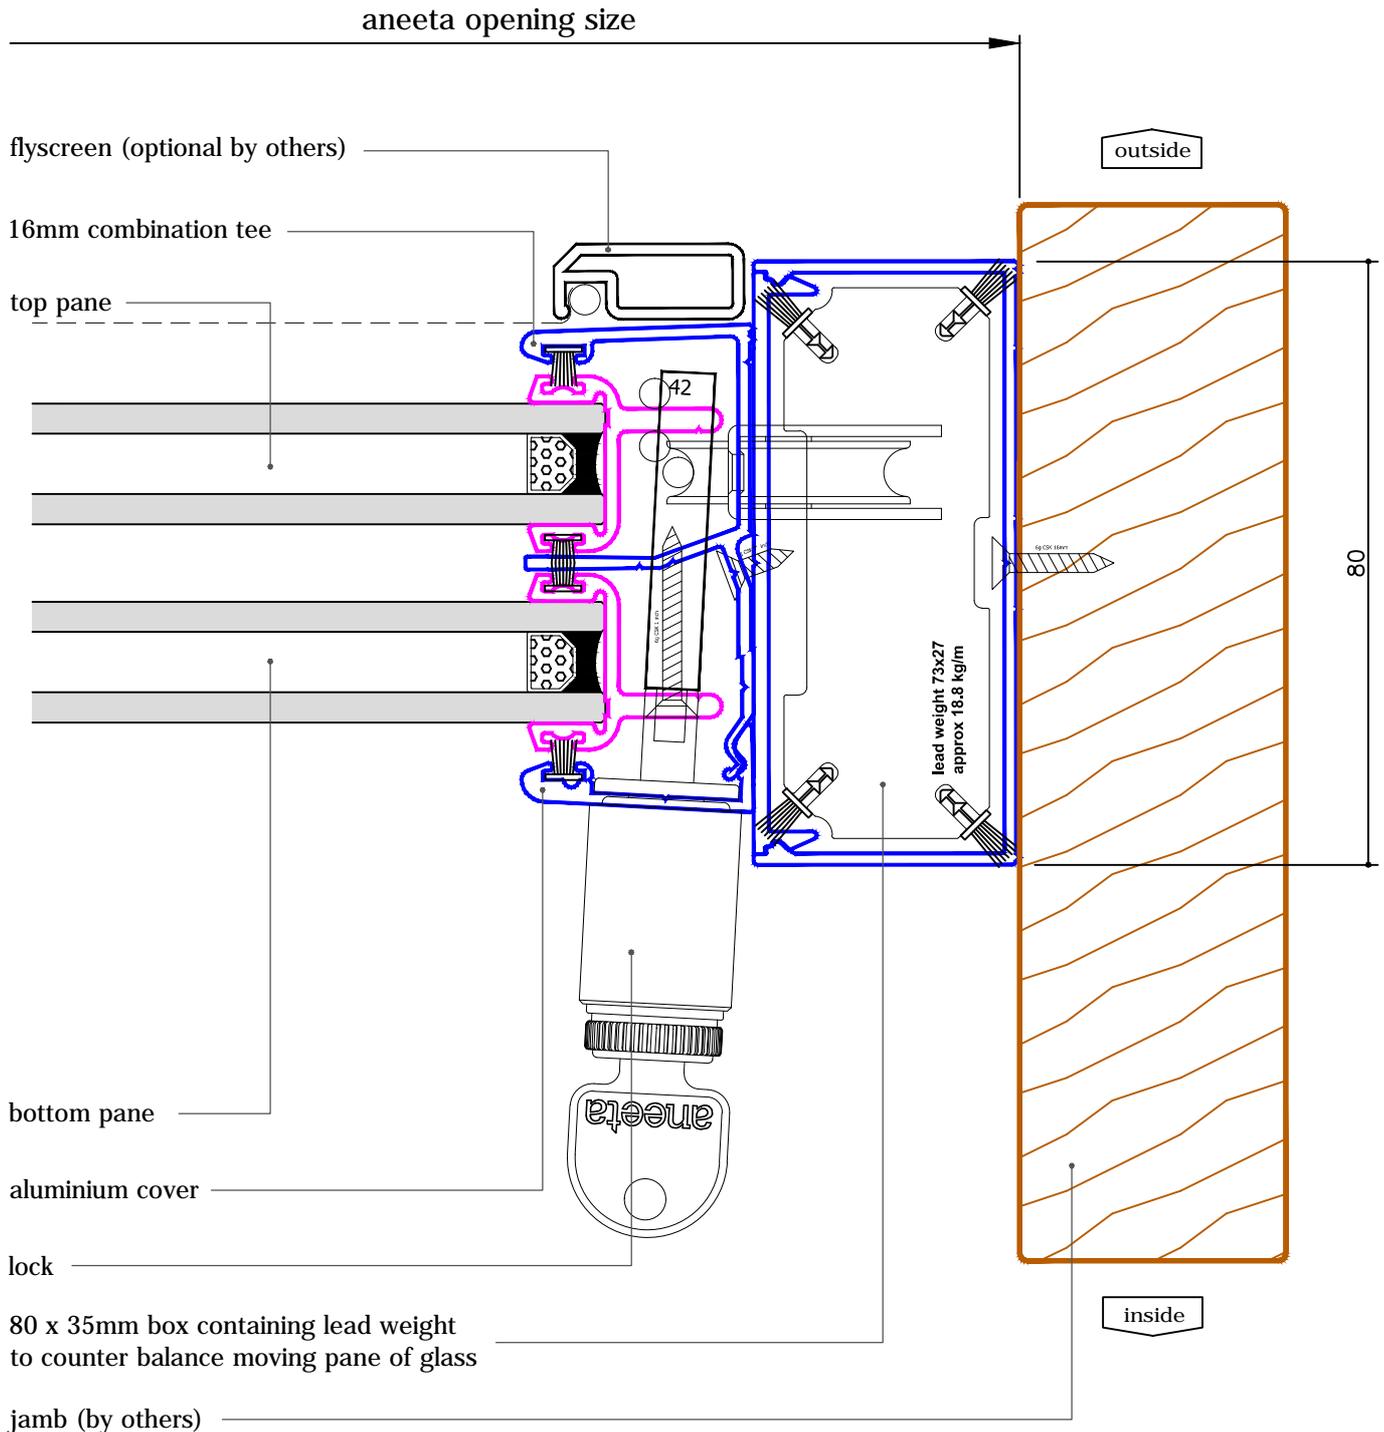For Technical Assistance Call
1800 653 207

2 pane servery 16mm double hung in timber frames
(bottom pane fixed - medium box, double glazed - CLEARSTEP model)
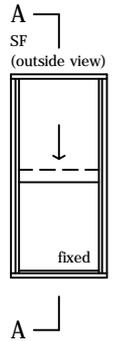
with aluminium covers
horizontal section B-B

SF
(outside view)

B | B

fixed

glass width = opening - 110mm

aneeta opening size

outside

flyscreen (optional by others)

16mm combination tee

top pane

42

6g CSK 16mm

lead weight 73x27
approx 18.8 kg/m

80

bottom pane

aneeta

aluminium cover

lock

80 x 35mm box containing lead weight
to counter balance moving pane of glass

inside

jamb (by others)

For Technical Assistance Call
1800 653 207

2 pane servery 16mm double hung in timber frames
(bottom pane fixed - large box, double glazed - CLEARSTEP model)

with aluminium covers
vertical section A-A

A
SF
(outside view)

↓

fixed

A

53 mm head rebate
53mm min

head (by others)

16mm VS head

standard handle (clear acrylic)

pulley and cord arrangement

glass height =
(opening + 50mm) / 2
Note: top pane is a stepped unit
difference is 58mm - 70mm lap

16mm lapseal

16mm glass edge L cap

double glazed sealed units
(4/8/4, 4/6/6, 5/6/5 toughened
glass preferable, with optional
gas fill i.e. argon)

flyscreen (by others)

draughtstrip

16mm glass edge U cap

sill (by others)

aneeta opening size

58

78mm min

78mm sill rebate

outside   inside

For Technical Assistance Call
1800 653 207

2 pane servery 16mm double hung in timber frames

(bottom pane fixed - large box, double glazed - CLEARSTEP model)
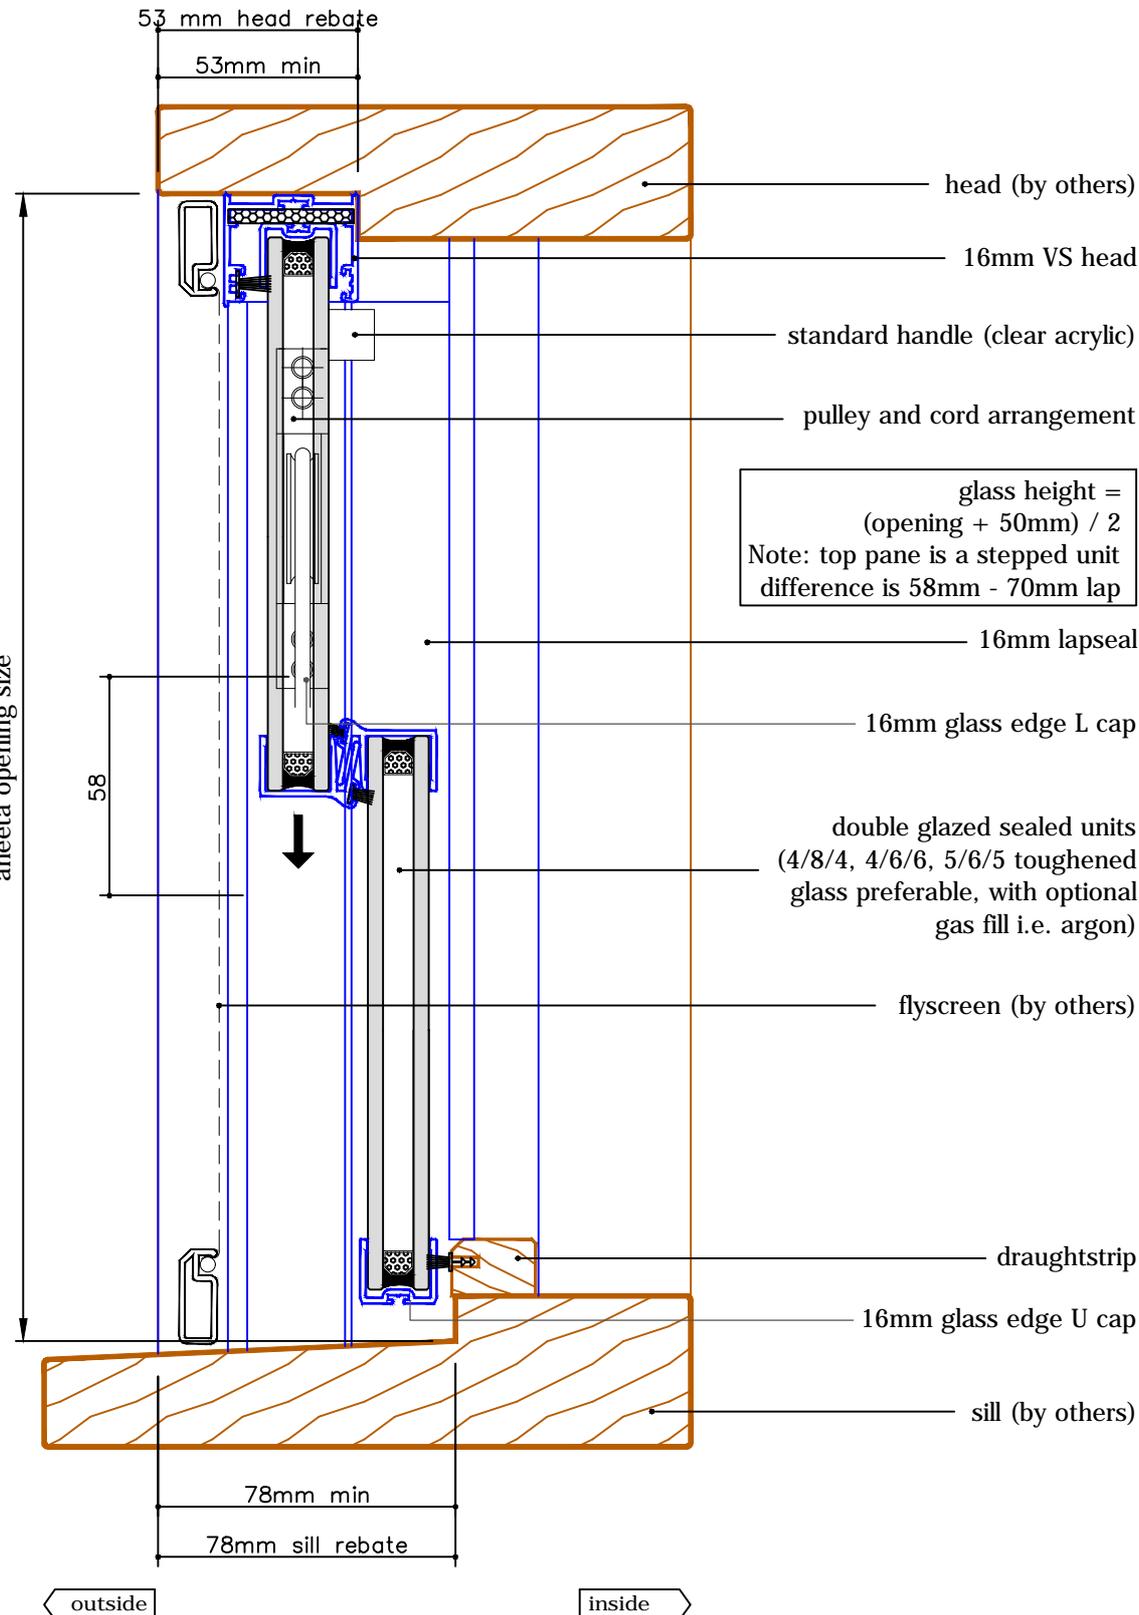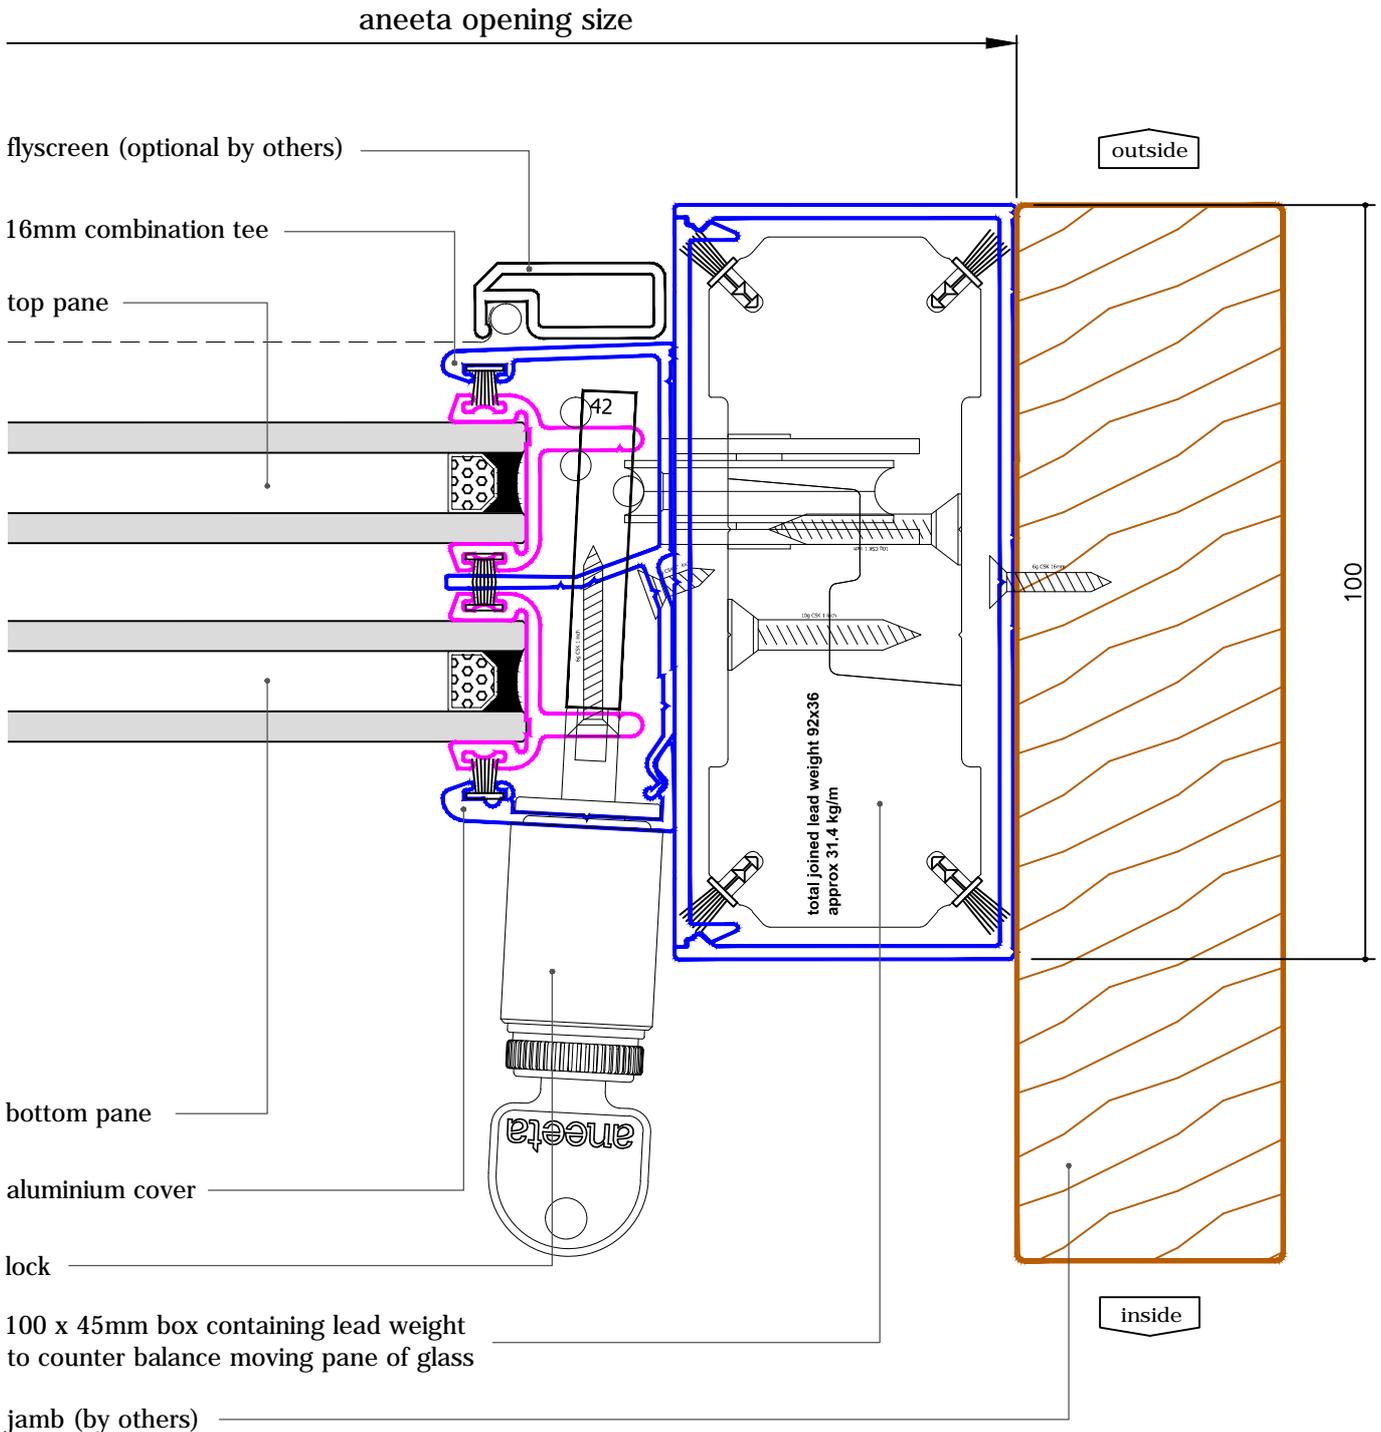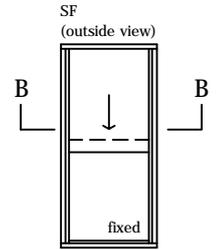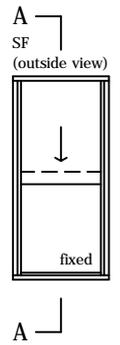
with aluminium covers
horizontal section B-B

SF
(outside view)

B ⌐ ↓ ⌐ B

fixed

glass width = opening - 130mm

aneeta opening size

outside

flyscreen (optional by others)

16mm combination tee

top pane

42

total joined lead weight 92x36
approx 31.4 kg/m

100

bottom pane

aneeta

aluminium cover

lock

100 x 45mm box containing lead weight
to counter balance moving pane of glass

inside

jamb (by others)

For Technical Assistance Call
1800 653 207

2 pane servery 16mm double hung in timber frames
(bottom pane fixed - extra large box, double glazed - CLEARSTEP model)

with aluminium covers
vertical section A-A

A
SF
(outside view)

↓

fixed

A

54 mm head rebate
54mm min

head (by others)

16mm VS head

standard handle (clear acrylic)

pulley and cord arrangement

glass height =
(opening + 50mm) / 2
Note: top pane is a stepped unit
difference is 58mm - 70mm lap

16mm lapseal

16mm glass edge L cap

aneeta opening size

58

double glazed sealed units
(4/8/4, 4/6/6, 5/6/5 toughened
glass preferable, with optional
gas fill i.e. argon)

flyscreen (by others)

draughtstrip

16mm glass edge U cap

sill (by others)

79mm min
79mm sill rebate

outside

inside

For Technical Assistance Call
1800 653 207

DOUBLE GLAZED PRODUCT

aneeta

2 pane servery 16mm double hung in timber frames

(bottom pane fixed - extra large box, double glazed - CLEARSTEP model)
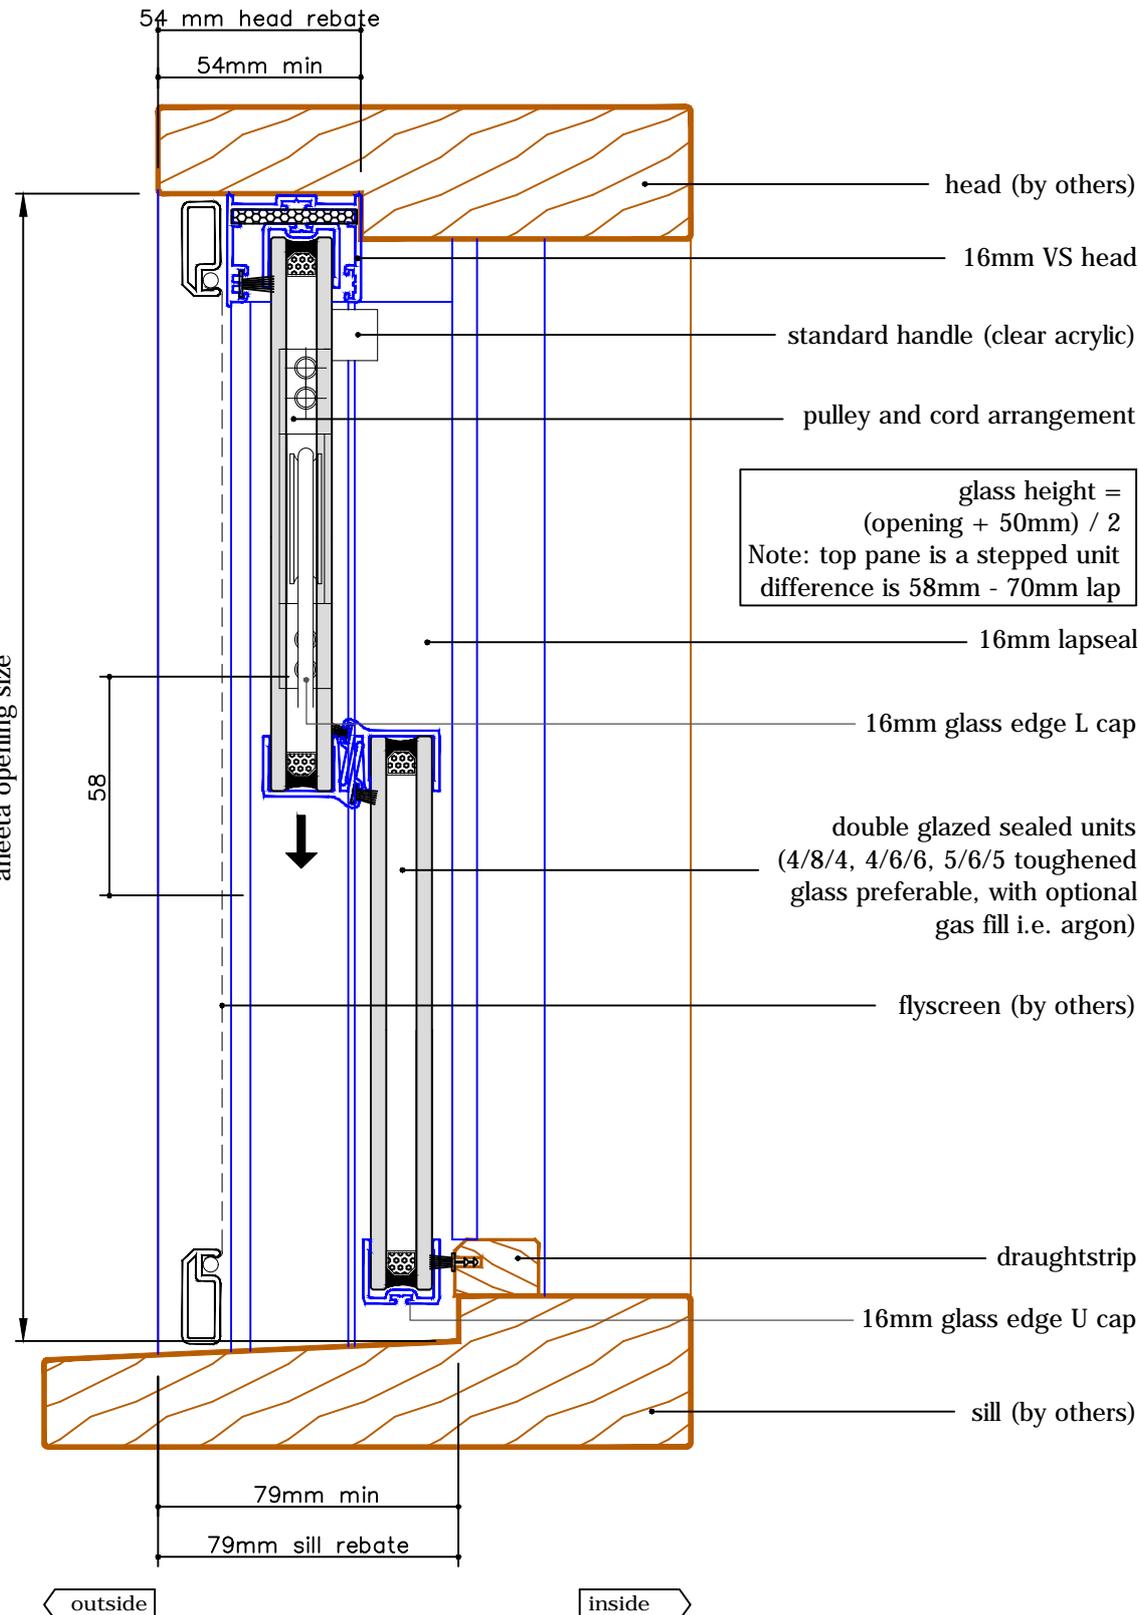
with aluminium covers
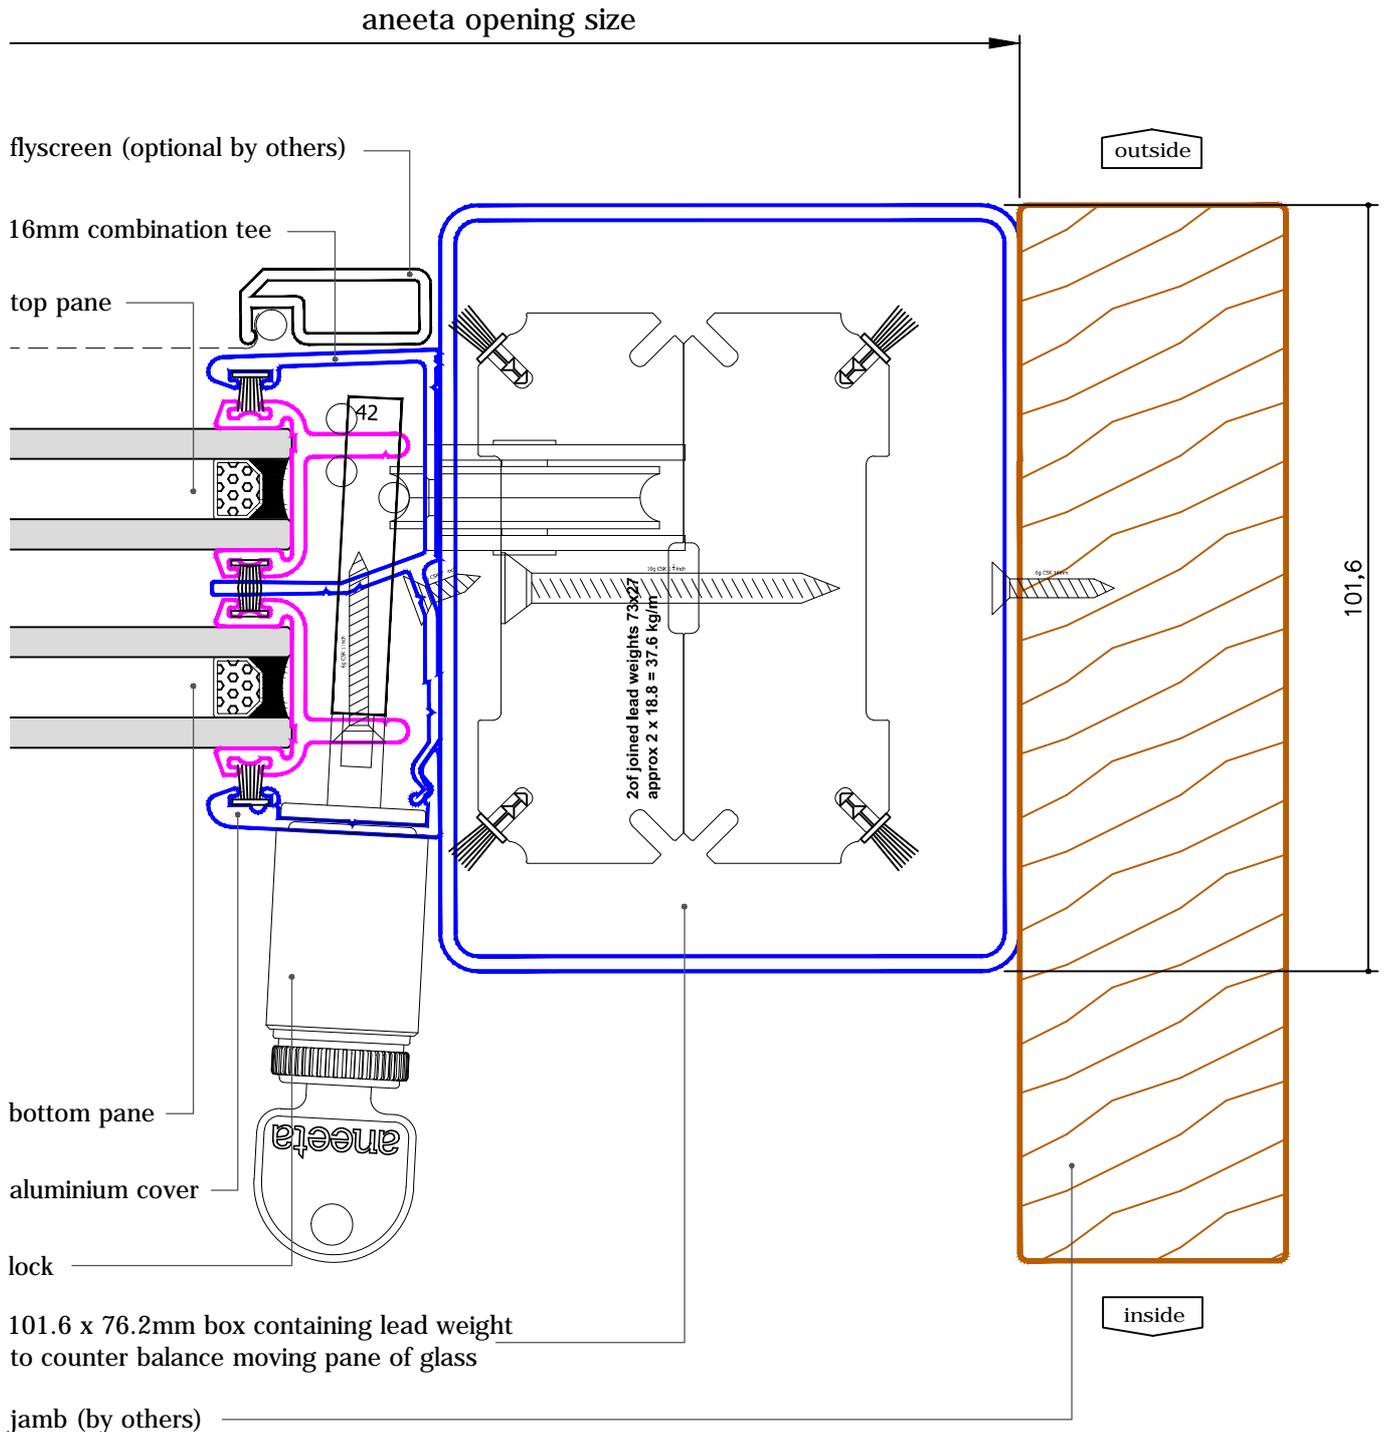horizontal section B-B

SF
(outside view)

B — B

↓

fixed

glass width = opening - 192mm

aneeta opening size

outside

flyscreen (optional by others)

16mm combination tee

top pane

42

2of joined lead weights 73x27
approx 2 x 18.8 = 37.6 kg/m

101,6

bottom pane

aluminium cover

lock

101.6 x 76.2mm box containing lead weight
to counter balance moving pane of glass

inside

jamb (by others)

For Technical Assistance Call
1800 653 207